


Firemaple backlit led panel light.

- IP40, IP65 are available.
- On/off, Triac, DALI dim available
- PC diffusor, PMMA diffusor available
- UGR>21 and UGR<19 available
- Motion sensor, emergency available.
- Instant start, no noise, no flickering.
- White aluminum frame housing.


➔ **Dimension Drawing**

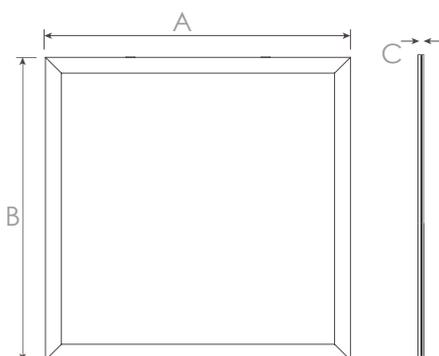


Model	A	B	C
BPL-6060-36W	595mm	595mm	35mm
BPL-6262-36W	620mm	620mm	35mm
BPL-3012-36W	295mm	1195mm	35mm

➔ **Connection**



Standard connection

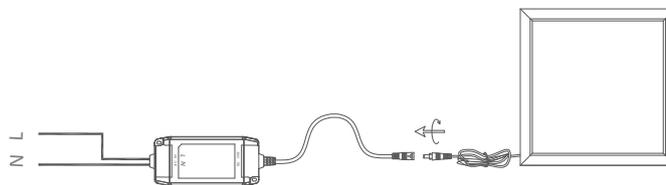

Dimmable connection

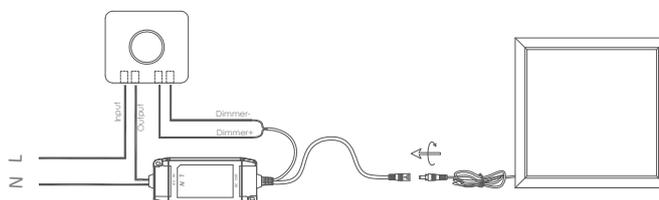

➔ Photometric diagram

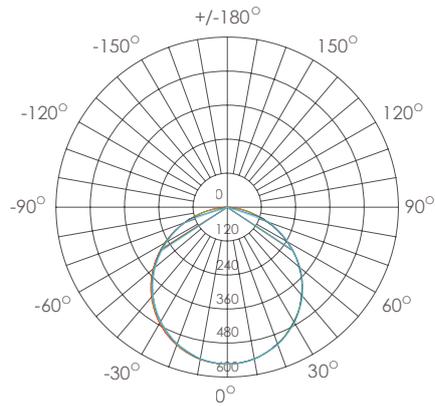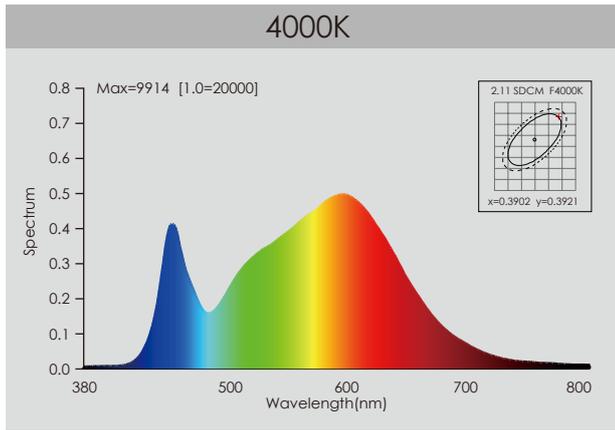


AVERAGE BEAM ANGLE (50%): 94.5 DEG

➔ Technical specification



Item	Parameter	Item	Parameter
Power	30W	Input Voltage	AC200-240V
Lumen output	4200lm	THD	<17%
CRI	RA80+	PF	>0.90
Frame	no grooves	Starting time.	<0.5S
Aluminum white	RAL9016	Working temperature	-20°C~45°C
Diffusor	PC UGR<19	Warranty	5 years
Dimmable	On/off, DALI	Mac Adam	<5

➔ Package

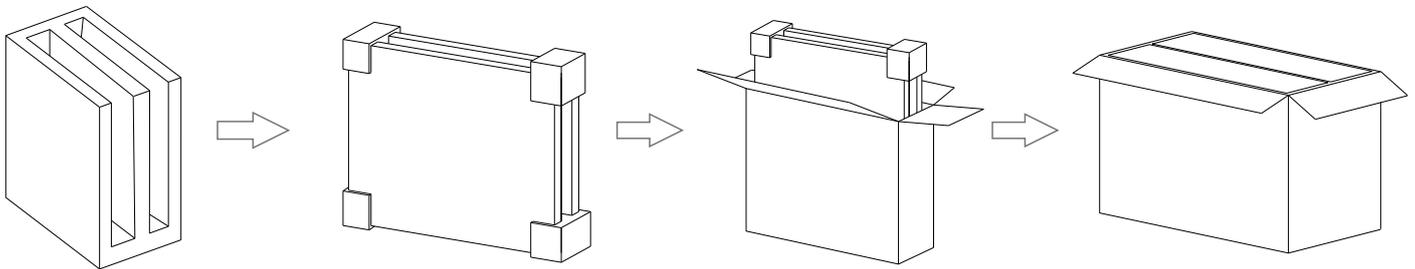

	Q'ty/CTN	N.W. /PCS (kg)	Size(mm)/CTN	G.W. (kg)/CTN
RPL-6060	10pcs	2.20kg	680*680*30	23.00
RPL-6262	10pcs	2.50kg	700*700*30	26.50
RPL-3012	10pcs	3.20kg	1280*380*30	34.00


→ Installation

WARNING ⚡

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.




Suspended installation.

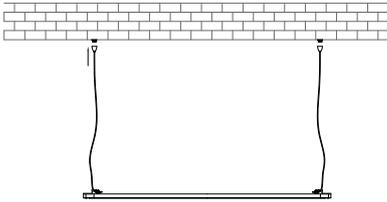


- ① Take the steel cable cross ceiling fixture, Nail bulge plugs to the hole, fix Ceiling fixture by screw.
- ② Hang up the 4 sets suspension kits.

Recessed installation (without clip)

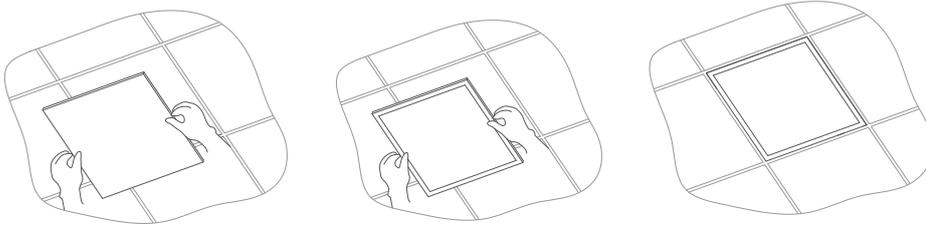


- ① Remove the ceiling plaster, connect the power line, then put LED panel on the ceiling screens.


Surface mounted installation

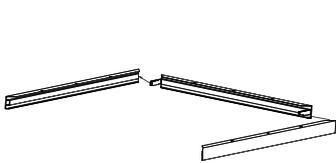

- ① Use the L shape Steel connector to connect each Aluminum frame

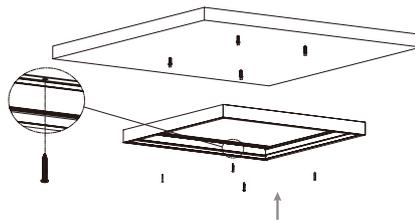

- ② Use screw to install the frame on the ceiling

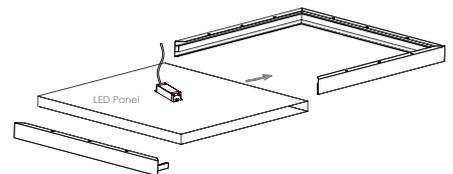

- ③ Slide the panel light into the surface mounting frame, then mount the final aluminum profile of the frame.