


Universal Trunking Retrofit System

# Click Fast




## Dimension (mm)

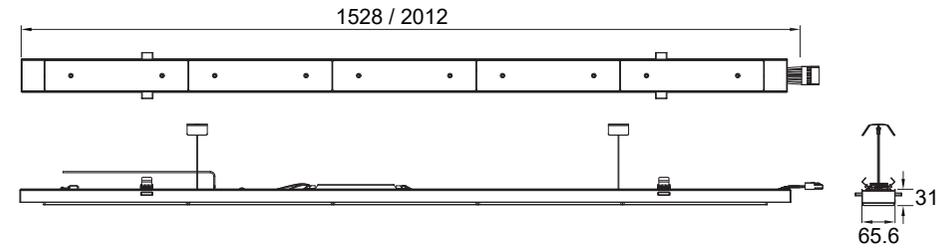

## ONE TO ALL SOLUTION


Best choice for updating and compatible with the existing T8 T5 trunking system.

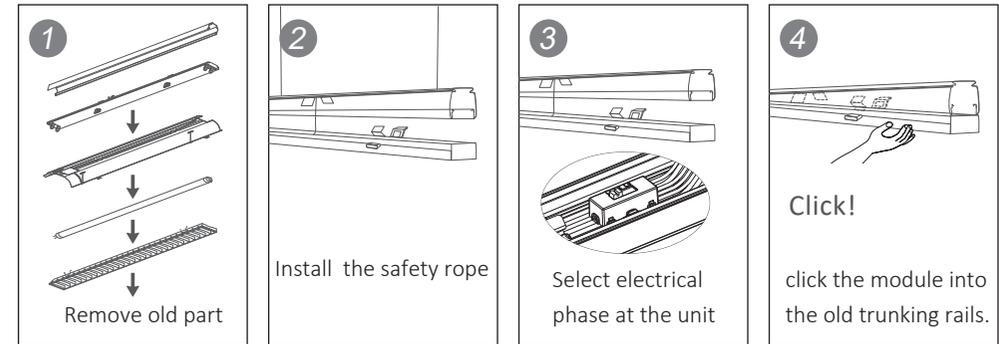

## Features

- Click design
- Power switchable
- Innovative optics
- Up to 180 LM/W
- 5-7 years warranty
- Easy to install
- Optional halogen-free wire
- Flicker Free
- Osram / Philips / Tridonic driver

## Optional Beam Angle

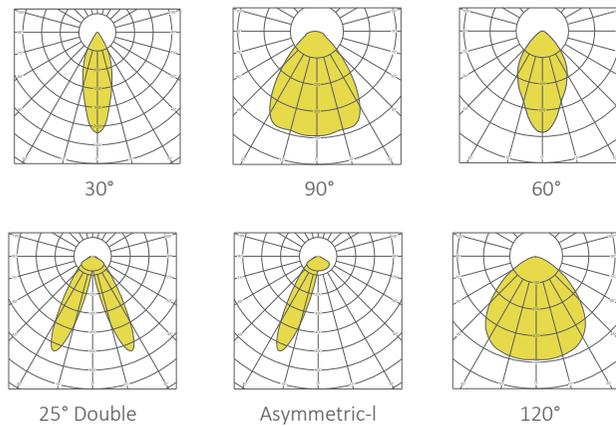

IP 20

5 Quality

L80  
80,000 H

Optional  
Halogen-free  
Wires

KEMA  
EUR

05

CE

RoHS

⊕

⊗


## Dip Switch Driver

With our warranty promise up to 5 or 7 years, We only use the highest quality components, such as Tridonic, Osram, etc. It's extremely easy to select the power range by setting the DIP switch.



# Compatible For All


Universal Linear retrofit for the old trunk rails  
Good for Stock

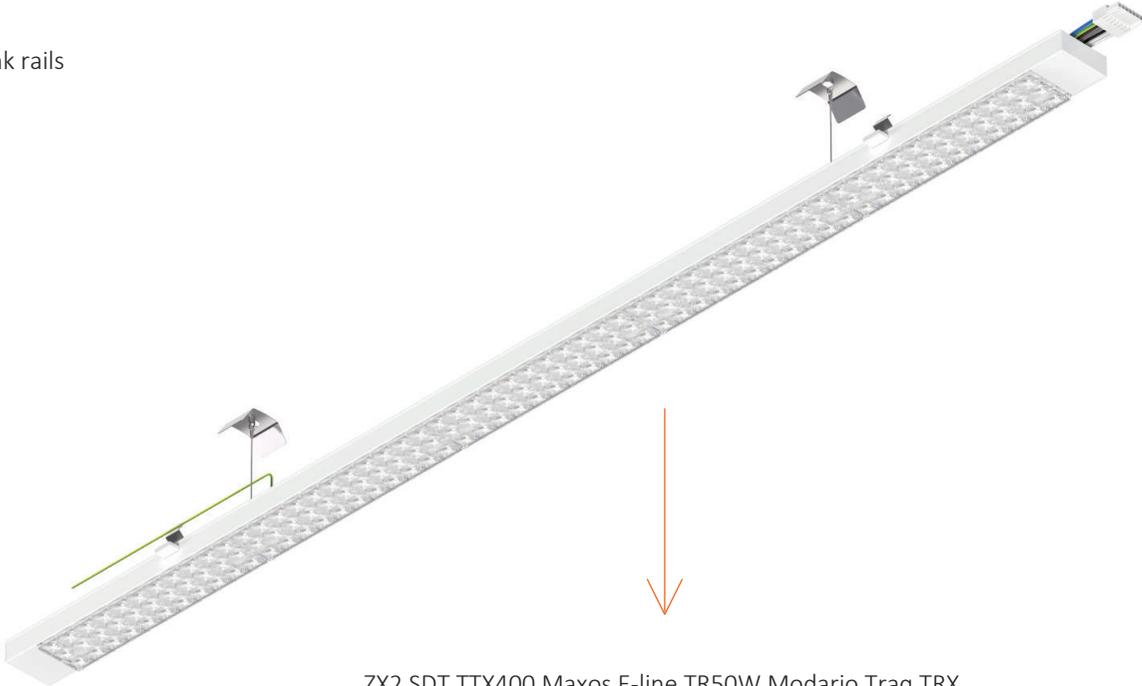

ZX2 SDT TTX400 Maxos E-line TR50W Modario Traq TRX



# Features

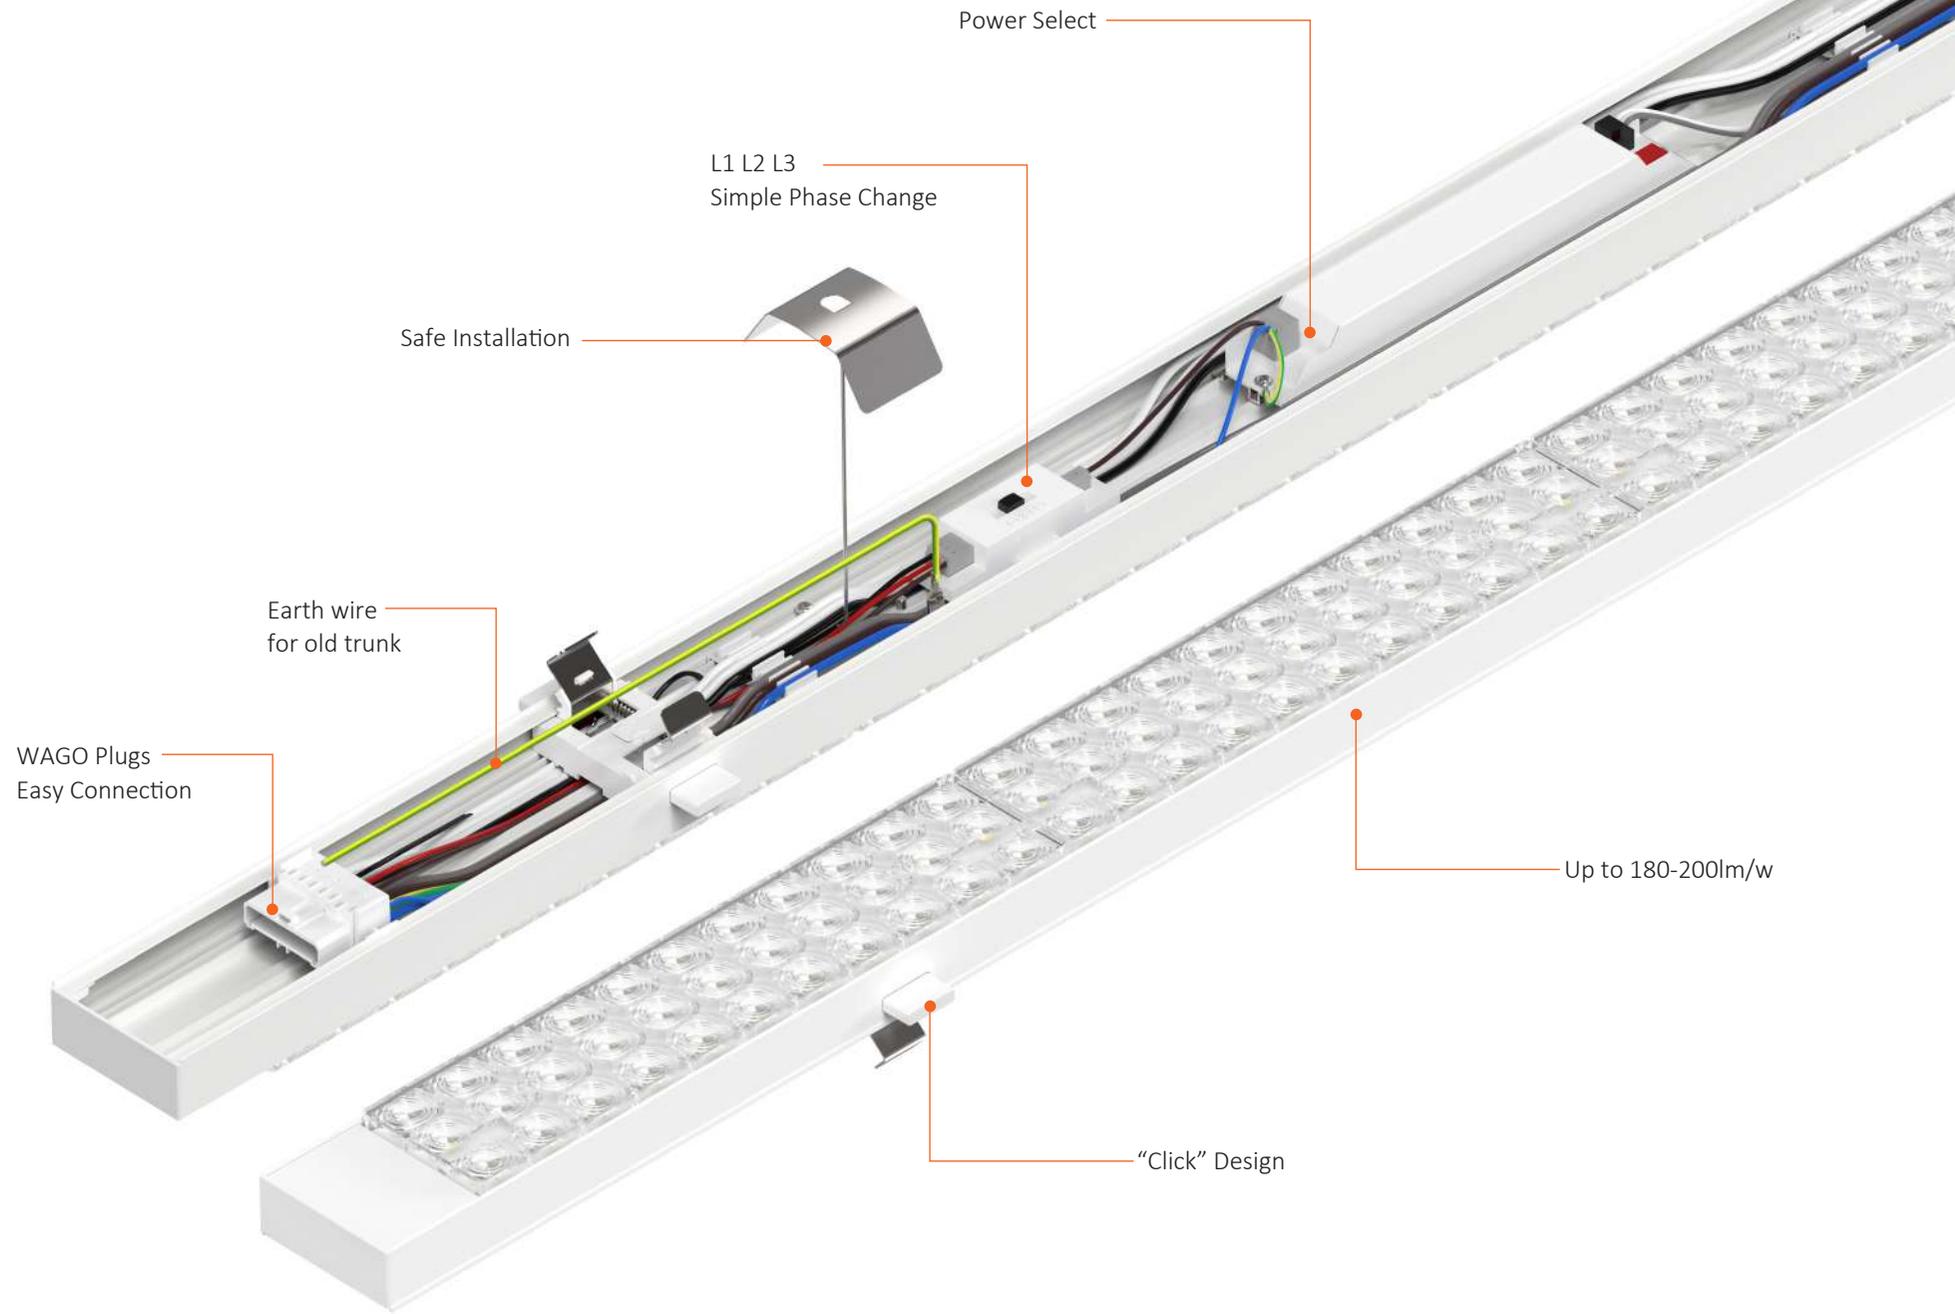

ITEM	Model No.	POWER	Length	CCT	Lens @4000K		Milky cover 120° @4000K		Driver	Input Voltage	Funcion	Wired-Through
					LM/W	Lumen	LM/W	Lumen				
1	A025P-3531-P1	35W-30W-25W-20W by Switch	1528mm	Tri-color 4000-5000-6000K	165	Max 5,800	/	/	Philips/Tridonic	AC 220-240V	ON/OFF	1x2.5mm <sup>2</sup> +4x1.5mm <sup>2</sup>
2	A025P-6031-P1	58W-50W-42W-33W by Switch	1528mm	Tri-color 4000-5000-6000K	160	Max 9,400	/	/	Philips/Tridonic	AC 220-240V	ON/OFF	1x2.5mm <sup>2</sup> +4x1.5mm <sup>2</sup>
3	A025P-3531-P4	max 35W	1528mm	Tri-color 4000-5000-6000K	165	Max 5,800	/	/	Philips	AC/DC 220-240V	DALI2 1-100%	1x2.5mm <sup>2</sup> +6x1.5mm <sup>2</sup>
4	A025P-6031-P4	max 60W	1528mm	Tri-color 4000-5000-6000K	160	Max 9,400	/	/	Philips	AC/DC 220-240V	DALI2 1-100%	1x2.5mm <sup>2</sup> +6x1.5mm <sup>2</sup>
5	A025P-6036-H6	max 60W	1528mm	Ra > 80/variable (2700 K - 6500 K)	160	Max 9,600	/	/	Sunricher	AC/DC 220-240V	DT8	1x2.5mm <sup>2</sup> +6x1.5mm <sup>2</sup>

ITEM	Model No.	POWER	Length	CCT	Lens @4000K		Milky cover 120° @4000K		Driver	Input Voltage	Funcion	Wired-Through
					LM/W	Lumen	LM/W	Lumen				
1	A025S-35-P1	35W-30W-25W-20W by Switch	1528mm	Single Color 3000K/3500K 4000K/5000K/6000K/6500K	170	Max 5,800	155	Max 5,400	Philips/Tridonic	AC 220-240V	ON/OFF	1x2.5mm <sup>2</sup> +4x1.5mm <sup>2</sup>
2	A025S-60-P1	58W-50W-42W-33W by Switch	1528mm	Single Color 3000K/3500K 4000K/5000K/6000K/6500K	160	Max 9,400	150	Max 9,000	Philips/Tridonic	AC 220-240V	ON/OFF	1x2.5mm <sup>2</sup> +4x1.5mm <sup>2</sup>
3	A025S-68-PC	68-60-54-48-38-32-25-20W by Switch	1528mm	Single Color 3000K/3500K 4000K/5000K/6000K/6500K	160	Max 10,800	145	Max 10,000	Philips	AC/DC 220-240V	ON/OFF	1x2.5mm <sup>2</sup> +4x1.5mm <sup>2</sup>
4	A025S-75-PC	75-67-58-51-43-37-28-22W by Switch	1528mm	Single Color 3000K/3500K 4000K/5000K/6000K/6500K	160	Max 12,000	145	Max 10,800	Philips	AC/DC 220-240V	ON/OFF	1x2.5mm <sup>2</sup> +4x1.5mm <sup>2</sup>
5	A025H-72-S1	72-65-52-46W by Switch	1528mm	Single Color 3000K/3500K 4000K/5000K/6000K/6500K	180	Max 12,800	145	Max 10,800	OSRAM	AC 220-240V	ON/OFF	1x2.5mm <sup>2</sup> +4x1.5mm <sup>2</sup>
6	A025S-35-P4	max 35W	1528mm	Single Color 3000K/3500K 4000K/5000K/6000K/6500K	165	Max 5,800	155	Max 5,400	Philips	AC/DC 220-240V	DALI2 1-100%	1x2.5mm <sup>2</sup> +6x1.5mm <sup>2</sup>
7	A025S-60-P4	max 60W	1528mm	Single Color 3000K/3500K 4000K/5000K/6000K/6500K	160	Max 9,400	150	Max 9,000	Philips	AC/DC 220-240V	DALI2 1-100%	1x2.5mm <sup>2</sup> +6x1.5mm <sup>2</sup>
8	A025S-68-P4	max 68W	1528mm	Single Color 3000K/3500K 4000K/5000K/6000K/6500K	160	Max 10,800	145	Max 10,000	Philips	AC/DC 220-240V	DALI2 1-100%	1x2.5mm <sup>2</sup> +6x1.5mm <sup>2</sup>
9	A025S-75-P4	max 75W	1528mm	Single Color 3000K/3500K 4000K/5000K/6000K/6500K	160	Max 12,000	145	Max 10,800	Philips	AC/DC 220-240V	DALI2 1-100%	1x2.5mm <sup>2</sup> +6x1.5mm <sup>2</sup>

ITEM	Model No.	POWER	Length	CCT	Lens @4000K		Milky cover 120° @4000K		Driver	Input Voltage	Funcion	Wired-Through
					LM/W	Lumen	LM/W	Lumen				
1	A027H-64-P1	64W-55W-46W-36W by Switch	2012mm	Single Color 3000K/4000K/ 5000K/6000K/6500K	180	Max 11,500	160	Max 10,200	Philips	AC 220-240V	ON/OFF	1x2.5mm <sup>2</sup> +4x1.5mm <sup>2</sup>
2	A027H-73-PC	73W-66W-60W-53W-42W- 35W-27W-21W by Switch	2012mm	Single Color 3000K/4000K/ 5000K/6000K/6500K	175	Max 13,000	160	Max 11,600	Philips	AC/DC 220-240V	ON/OFF	1x2.5mm <sup>2</sup> +4x1.5mm <sup>2</sup>
3	A027H-88-P1	Max 88W	2012mm	Single Color 3000K/4000K/ 5000K/6000K/6500K	170	Max 15,000	160	Max 14,000	Philips	AC/DC 220-240V	ON/OFF	1x2.5mm <sup>2</sup> +4x1.5mm <sup>2</sup>
4	A027P-109-T1	109W	2012mm	Single Color 3000K/4000K/ 5000K/6000K/6500K	180	Max 20,000	/	/	Tridonic	AC/DC 220-240V	ON/OFF	1x2.5mm <sup>2</sup> +4x1.5mm <sup>2</sup>
5	A027H-60-P4	60W by Switch	2012mm	Single Color 3000K/4000K/ 5000K/6000K/6500K	180	Max 10,800	160	Max 10,000	Philips	AC/DC 220-240V	DALI2 1-100%	1x2.5mm <sup>2</sup> +6x1.5mm <sup>2</sup>
6	A027H-75-P4	75W	2012mm	Single Color 3000K/4000K/ 5000K/6000K/6500K	175	Max 13,000	160	Max 11,600	Philips	AC/DC 220-240V	DALI2 1-100%	1x2.5mm <sup>2</sup> +6x1.5mm <sup>2</sup>
7	A027H-88-P4	max 88W	2012mm	Single Color 3000K/4000K/ 5000K/6000K/6500K	170	Max 15,000	160	Max 14,000	Philips	AC/DC 220-240V	DALI2 1-100%	1x2.5mm <sup>2</sup> +6x1.5mm <sup>2</sup>
8	A027P-109-P4	MAX 129W	2012mm	Single Color 3000K/4000K/ 5000K/6000K/6500K	180	Max 20,000	/	/	Philips	AC/DC 220-240V	DALI2 1-100%	1x2.5mm <sup>2</sup> +6x1.5mm <sup>2</sup>




## Accessory

ITEM	Model No.	Notes	Description	Picture
1	SN-EDZ0017-02-00	WAGO 267-501	7 pins, Male connectr for ac input	
	SN-EDZ0025-02-00	WAGO 267-510	7 pins, Female connectr for ac output	
2	BC-A02-AL-2W-1528-00	Universal blind cover	1528mm AL blind cover	
	BC-A02-AL-2W-2012-00	Universal blind cover	2012mm AL blind cover	
3	BC-A05-PC-0W-1528-00	Universal blind cover	1528mm PC blind cover	
4	SN-WCY0221-01-00	Spring	Working with pc blind cover "BC-A05-PC-0W-1528-00"	
5	COW5-16-50-01	Connecting wire	1.6m 5 wire 5x2.5m <sup>2</sup> with male and female connector	
	COW7-16-70-01	Connecting wire	1.6m 7 wire 7x2.5m <sup>2</sup> with male and female connector	
6	COW5-20-50-01	Connecting wire	2.05m 5 wire 5x2.5m <sup>2</sup> with male and female connector	
	COW7-20-70-01	Connecting wire	2.05m 7 wire 7x2.5m <sup>2</sup> with male and female connector	
7	COW5-32-50-01	Connecting wire	3.2m 5 wire 5x2.5m <sup>2</sup> with male and female connector	
	COW7-32-70-01	Connecting wire	3.2m 7 wire 7x2.5m <sup>2</sup> with male and female connector	
8	COW5-16-14-01	Connecting wire	1.6m 5 wire 1x2.5m <sup>2</sup> +4x1.5m <sup>2</sup> with male and female connector	
	COW7-16-16-01	Connecting wire	1.6m 7 wire 1x2.5m <sup>2</sup> +6x1.5m <sup>2</sup> with male and female connector	
9	COW5-20-14-01	Connecting wire	2.05m 5 wire 1x2.5m <sup>2</sup> +4x1.5m <sup>2</sup> with male and female connector	
	COW7-20-16-01	Connecting wire	2.05m 5 wire 1x2.5m <sup>2</sup> +4x1.5m <sup>2</sup> with male and female connector	
10	COW5-32-14-01	Connecting wire	3.2m 5 wire 1x2.5m <sup>2</sup> +4x1.5m <sup>2</sup> with male and female connector	
	COW7-32-16-01	Connecting wire	3.2m 7 wire 1x2.5m <sup>2</sup> +6x1.5m <sup>2</sup> with male and female connector	


## NEW Building Project

ITEM	Model No.	Notes	Description	Picture
1	TKC50-00W-00	Trunking rails	1528MM Empty Trunking rails without cable	
	TKC90-00W-00	Trunking rails	3056MM Empty Trunking rails without cable	
	TKCA0-00W-00	Trunking rails	1475MM Empty Trunking rails without cable	
	TKCB0-00W-00	Trunking rails	2950MM Empty Trunking rails without cable	
2	BC-A02-PC-0W-1475-00	Blind cover	Working with TKC trunking rails 1475mm	
	BC-A02-PC-0W-1528-00	Blind cover	Working with TKC trunking rails 1528mm	
3	EC-TKA-W1-01	End or Input cap	White end cap	
4	MK-A61-00	surface ceiling fixing	M6 Hole	
5	SMK-2M-A61-00	Steel cable suspesion kits	2m Stainless steel sling	
	SMK-3M-A61-00	Steel cable suspesion kits	3m Stainless steel sling	
	SMK-4M-A61-00	Steel cable suspesion kits	4m Stainless steel sling	
	SMK-5M-A61-00	Steel cable suspesion kits	5m Stainless steel sling	
6	DMK-A61-01-00	Chain suspension kits	without chain, only Bracket	
	DSK-A61-01-00	Chain suspension kits	without chain ,only Bracket can be fine-tuned	

## Standard Compatible List

ITEM	Brand	Trunking Name	Picture
1	Trilux	07650XX	
2	Trilux	07690XX	
3	Zumtobel	ZX2	
4	Regiolux	SDT	
5	AEG/PHILIPS	Maxos	
6	Philips	TTX400	
7	Lite Licht	E-STN	
8	RIDI	NEW VLT	

ITEM	Brand	Trunking Name	Picture
9	Zumtobel	ZX1	
10	Siemens	5LJ80XX	
11	Siemens	5LS8..	
12	Siteco	Modario	
13	Ludwig	TR50W	
14	Antaris	Antaris	
15	Kandem	SV70,SV75	
16	RZB	Planos	

ITEM	Brand	Trunking Name	Picture
17	Norton	NSL	
18	Fluolite	TRX/TRZ	
19	Thron	090554/098287	
20	OMS	Presige	
21	MOLTOMX	Presige	
22	VEKO	PRN	