




UGR<19





RPL02 Round led panel series

- IP20, IP54 and IP65 available
- On/off, Triac dim, DALI dim available
- PC diffusor, PMMA diffusor available
- UGR>21 and UGR<19 are available
- Motion sensor, emergency available.
- Instant start, no noise, no flickering
- Environment friendly, without Mercury or hazardous substances





➔ **Dimension Drawing**

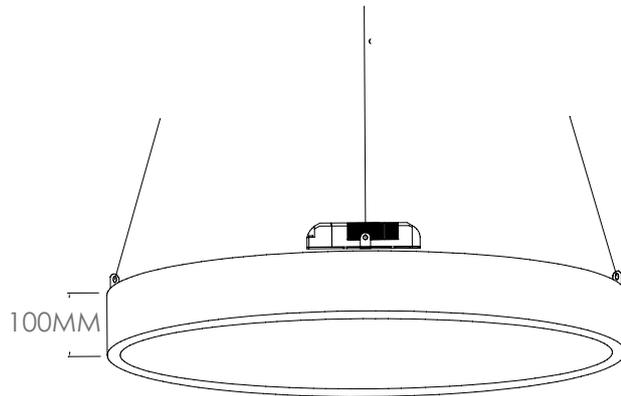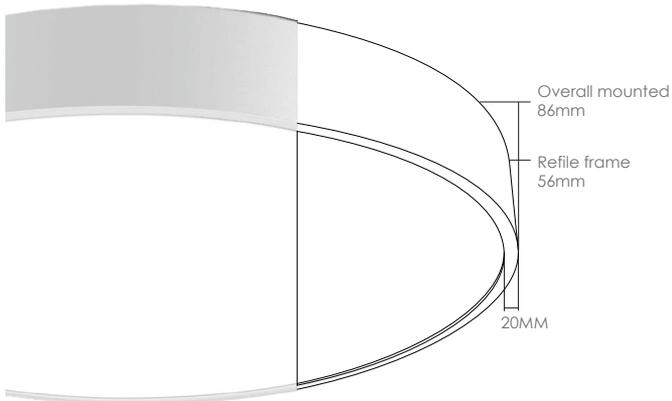

Model	Diameter	Height
600mm	600mm	100mm
800mm	800mm	100mm
900mm	900mm	100mm
1000mm	1000mm	100mm
1200mm	1200mm	100mm

➔ Photometric diagram

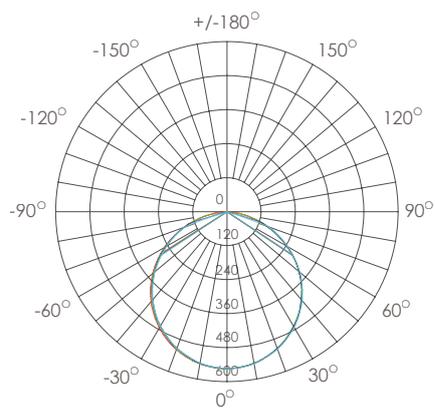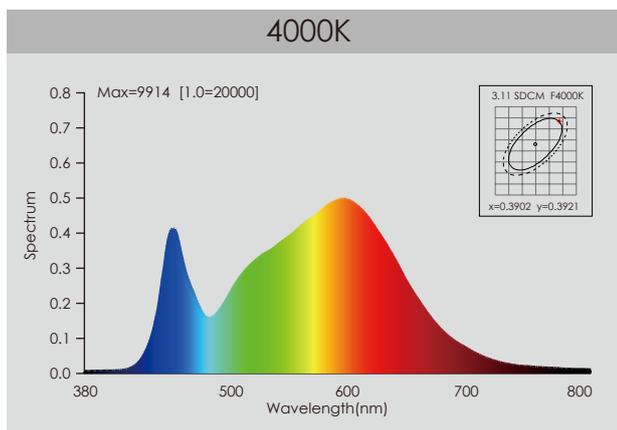

UNIT: cd

- C0/180, 113.8 deg
- C30/210, 113.3 deg
- C60/240, 112.9 deg
- C90/270, 112.7 deg

AVERAGE BEAM ANGLE (50%): 113.1DEG

➔ Technical specification



Size	Power	CCT	Lumen efficiency	Item	Parameter
600	36/48W	3000-6000K	90-120lm/w	Input Voltage	AC200-240V
800	70/80W	3000-6000K	90-120lm/w	THD	<17%
900	80/90W	3000-6000K	90-120lm/w	PF	>0.90
1000	80/100W	3000-6000K	90-120lm/w	Starting time.	<0.5S
1200	100/120W	3000-6000K	90-120lm/w	Working temperature	-20°C~45°C
				Warranty	5 years
				Mac Adam	<5

➔ Connection




Male and female connectors

Standard version




0/1-10V dim version

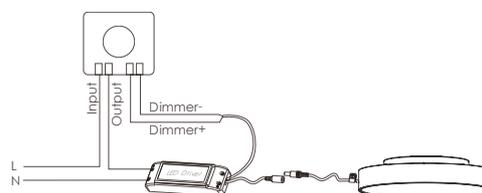

Triac-dim version



Emergency version

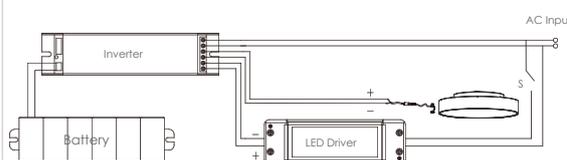


➔ Installation


Surface mounted



Suspended cord



➔ Package

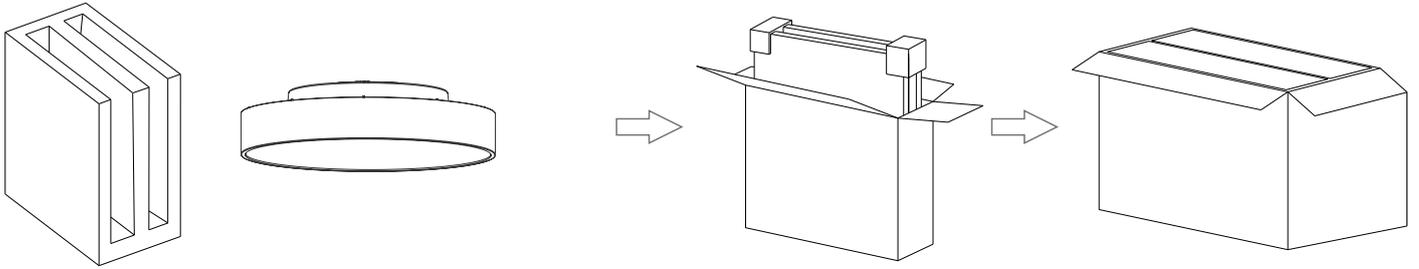

	Q'ty/CTN	N.W. /PCS (kg)	Size(mm)/CTN	G.W. (kg)/CTN
Φ 600mm	1pcs	6.50kg	700*700*180	10.00
Φ 900mm	1pcs	7.60kg	1000*1000*180	13.00
Φ 1000mm	1pcs	8.20kg	1100*1100*200	18.00
Φ 1200mm	1pcs	9.20kg	1300*1300*200	21.00