



T8 T5 Trunking Retrofit
SuperFit



ONE TO ONE SOLUTION

With LED Luminaire Retrofit you switch your existing trunking system
Without tools and within 44 seconds to LED!



For:
TTX400 T5/ T8
E-line T5/ T8
Maxos T5/ T8
Tecton T5/ T8
DUS T5/ T8
SDT T5/ T8



Features

- Own tooling
- Power switchable
- Innovative optics
- Up to 180 LM/W
- Seamless connection
- Tool-free installaton
- White housing
- Osram/ Philips driver

Optional Beam Angle

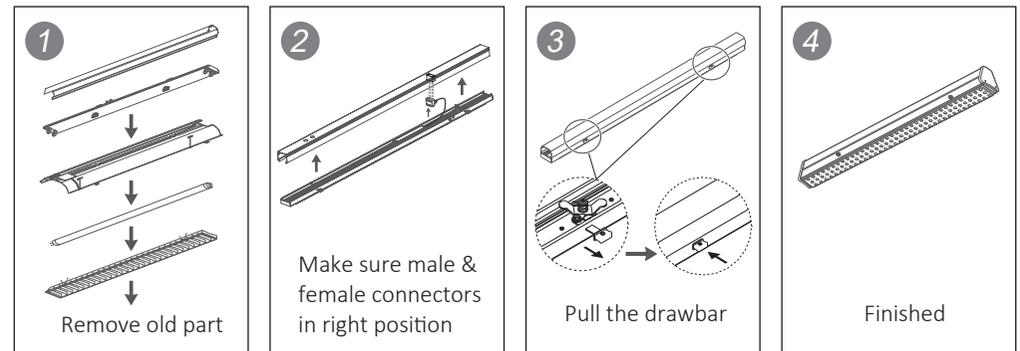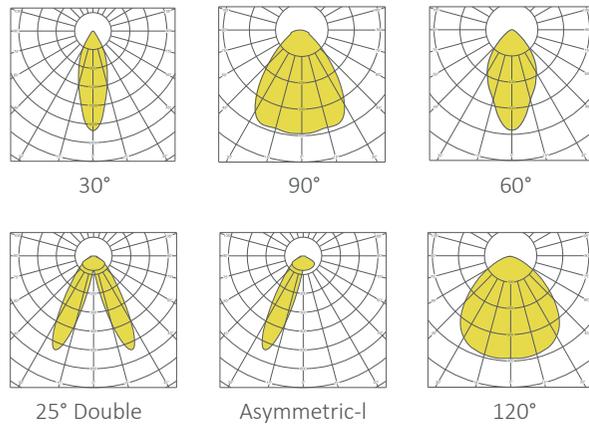

IP 20

5
Quality

L80
80,000 H

Optional
Haloge-free
Wires

KEMA
EUR

05

CE

RoHS




ONE TO ONE

Perfect combination of connector and length
Project-oriented lighting solution



Features

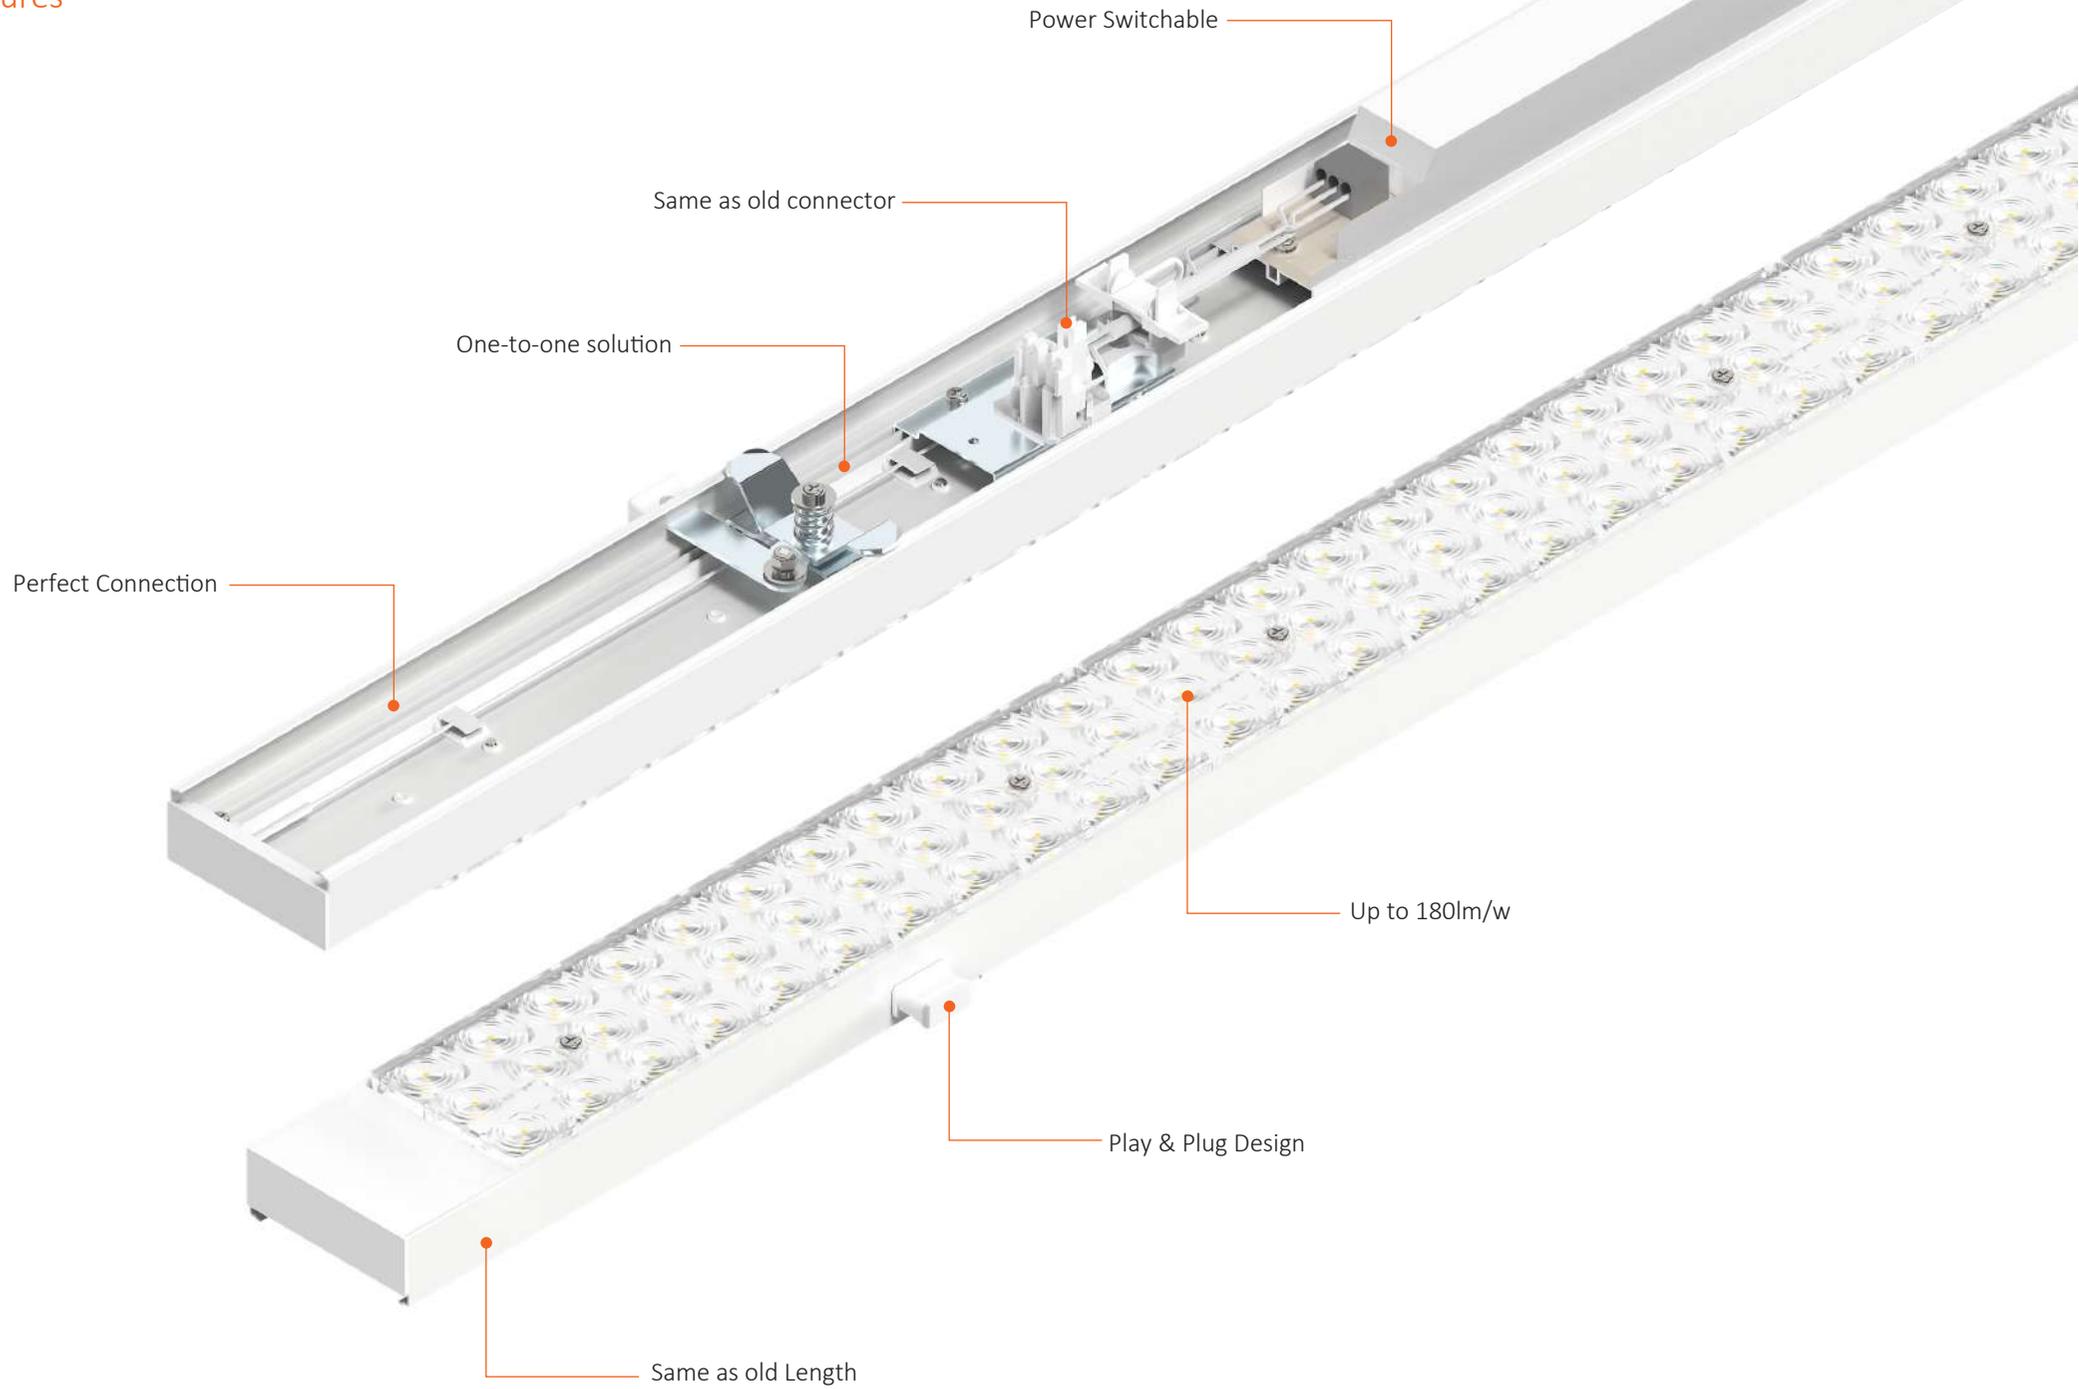

ITEM	Model No.	POWER	Length	CCT	Lens @4000K		Milky cover 120° @4000K		Driver	Input Voltage	Function
					LM/W	Lumen	LM/W	Lumen			
1	XXX5P-3531-P1	35W-30W-25W-20W by switch	same as old T8 T5 length	Tri-color 4000-5000-6000K	165	Max 5,800	/	/	Philips/Tridonic	AC 220-240V	ON/OFF
2	XXX5P-6031-P1	58W-50W-42W-33W by switch	same as old T8 T5 length	Tri-color 4000-5000-6000K	160	Max 9,400	/	/	Philips/Tridonic	AC 220-240V	ON/OFF
3	XXX5P-3531-P4	Max 35W	same as old T8 T5 length	Tri-color 4000-5000-6000K	165	Max 5800	/	/	Philips	AC/DC 220-240V	DALI2 1-100%
4	XXX5P-6031-P4	Max 60W	same as old T8 T5 length	Tri-color 4000-5000-6000K	160	Max 9,400	/	/	Philips	AC/DC 220-240V	DALI2 1-100%
5	XXX5P-6036-H6	Max 60W	same as old T8 T5 length	2700K-6500K	160	Max 9,600	/	/	Sunricher	AC/DC 220-240V	DT8

ITEM	Model No.	POWER	Length	CCT	Lens @4000K		Milky cover 120° @4000K		Driver	Input Voltage	Function
					LM/W	Lumen	LM/W	Lumen			
1	XXX5S-35-P1	35W-30W-25W-20W by switch	same as old T8 T5 length	Single Color 3000K 3500K 4000K 5000K 6000K 6500K	170	Max 5,800	155	Max 5,400	Philips/Tridonic	AC 220-240V	ON/OFF
2	XXX5S-60-P1	58W-50W-42W-33W by switch	same as old T8 T5 length	Single Color 3000K 3500K 4000K 5000K 6000K 6500K	160	Max 9,400	150	Max 9,000	Philips/Tridonic	AC 220-240V	ON/OFF
3	XXX5S-68-PC	68-60-54-48-38-32-25-20W by switch	same as old T8 T5 length	Single Color 3000K 3500K 4000K 5000K 6000K 6500K	160	Max 10,800	145	Max 10,000	Philips	AC/DC 220-240V	ON/OFF
4	XXX5S-75-PC	75-67-58-51-43-37-28-22W by switch	same as old T8 T5 length	Single Color 3000K 3500K 4000K 5000K 6000K 6500K	160	Max 12,000	145	Max 10,800	Philips	AC/DC 220-240V	ON/OFF
5	XXX5H-72-S1	72-65-52-46W by switch	same as old T8 T5 length	Single Color 3000K 3500K 4000K 5000K 6000K 6500K	180	Max 12,800	145	Max 10,800	Osram	AC 220-240V	ON/OFF
6	XXX5S-35-P4	Max 35W	same as old T8 T5 length	Single Color 3000K 3500K 4000K 5000K 6000K 6500K	165	Max 5800	155	Max 5,400	Philips	AC/DC 220-240V	DALI2 1-100%
7	XXX5S-60-P4	Max 60W	same as old T8 T5 length	Single Color 3000K 3500K 4000K 5000K 6000K 6500K	160	Max 9,400	150	Max 9,000	Philips	AC/DC 220-240V	DALI2 1-100%
8	XXX5S-68-P4	Max 68W	same as old T8 T5 length	Single Color 3000K 3500K 4000K 5000K 6000K 6500K	160	Max 10,800	145	Max 10,000	Philips	AC/DC 220-240V	DALI2 1-100%
9	XXX5S-75-P4	Max 75W	same as old T8 T5 length	Single Color 3000K 3500K 4000K 5000K 6000K 6500K	160	Max 12,000	145	Max 10,800	Philips	AC/DC 220-240V	DALI2 1-100%

Produce Code

	1		2		3		4		5		6		7		8		9	
	Mode	Length	LM/W@60W	Connector	POWER	CCT	Beam angle	Driver brand	Function									
TE8	Trilux E-line 07690 T8	5 5FT	D <145	3 3PLUG	60 60W	W2 830	WD 90°	P Philips	1 on/off									
TE5	Trilux E-line 07650 T5		S 160	5 5PLUG	68 68W	N1 840	NR 60°	S Osram	3 1-10v									
RS8	Regiolux SDT T8 T5		H >170		70 70W	P1 850	SP 30°	B Boke	4 Dali2 1-100%									
RP8	Regiolux SPT T8 T5		P >180			C1 860	DS DA25°	T Tridonic										
	See the Compatible List						C2 865	FF Milky	M ON/off+EM									

Accessories

ITEM	Model No.	Notes	Description	Picture
1	BC-PT-PC-0W-1528-00	TTX400/MAXOS Blind cover	1528mm PC	
	BC-PT-PC-0W-1474-00	TTX400/MAXOS Blind cover	1474mm PC	
	BC-TE-PC-0W-1528-00	E-LINE T8 Blind cover	1530mm PC	
	BC-TE-PC-0W-1474-00	E-LINE T5 Blind cover	1475mm PC	
	BC-ZT-PC-0W-1522-00	TECTON Blind cover	1522mm PC	
	BC-ZT-PC-0W-1500-00	TECTON Blind cover	1500mm PC	
	BC-ZT-PC-0W-1472-00	TECTON Blind cover	1472mm PC	

Compatible List

ITEM	Firemaple Model No.	Replacment for		
		Brand	name	Length
1	TE8	Trilux	E-line 07690XX	T8
2	TE5	Trilux	E-line 07650XX	T5
3	TR8	Trilux	7910 7920	T8
4	LE8	Trilux	7770/7761	T8
5	RS8	REGIOLIX	SDT	T8/T5
6	RP8	REGIOLIX	SPT/SMT	T8/T5
7	LT8	LUDWIG	TR50W	T8/T5
8	LT8	Kandem	SV70, SV75	T8/T5
9	LT8	RZB	Planos	T8/T5
10	LT8	Antaris		T8/T5
11	LS8	Ludwig	TR65/ST	T8/T5
12	FT8	Fluolite	TRX /TRZ	T8/T5
13	FT8	Norton	NSL	T8
14	FT5	Norton/Fluolite	NSL	T5
15	TH8	Thron	098287-..	T8 T5
16	TH8	Thron	090554	T8 T5

ITEM	Firemaple Model No.	Replacment for		
		Brand	name	Length
17	PT8	PHILIPS	TTX400	T8
18	PT8	PHILIPS	MAXOS	T8
19	PT8	AEG	MAXOS	T8
20	PT5	PHILIPS	TTX400	T5
21	PM5	PHILIPS	MAXOS	T5
22	P28	PHILIPS	TTX200	T8/T5
23	AG8	AEG	Gealux	T8/T5
24	SM5	SITECO	Modario	T5
25	SD8	SITECO	DUS	T8 T5
26	SD8	SIEMENS	5LJ908	T8 T5
27	SJ8	SIEMENS	5LJ 8..	T8 T5
28	SJ8	SIEMENS	5LS 8..	T8 T5
29	OP5	OMS	Presi g ge	T5
30	OP5	MOLTOMX	910 180e	T5
31	OP8	OMS	Presi g ge	T8
32	OP8	MOLTOMX	910 180e	T8

ITEM	Firemaple Model No.	Replacment for		
		Brand	name	Length
33	ZT5	Zumtobel	TECTON	T5 1472mm
34	ZT6	Zumtobel	TECTON	T5 1500mm
35	ZT8	Zumtobel	TECTON	T8 1522mm
36	ZZ5	Zumtobel	ZX2	T5
37	ZZ8	Zumtobel	ZX2	T8
38	ZX5	Zumtobel	ZX1	T5
39	ZX8	Zumtobel	ZX1	T8
40	RL8	RIDI	NEW VLT	T8 (no connector)
41	RL5	RIDI	NEW VLT	T5 (no connector)
42	RV8	RIDI	OLD VLT	T8
43	RV5	RIDI	OLD VLT	T5
44	LQ5	Lite Licht	Q-TS	T5-1494mm
45	LQ6	LITE_Lunux	Q-emms	T5-1494mm
46	LQ8	Lite Licht	Q-TS	T8-1538MM
47	LQ9	LITE_Lunux	Q-emms	T8-1538MM
48	LE8	Lite-Licht	E-STN	T8 T5