






TRP01 series IP65 triproof light.



- IP65 waterproof /dust proof /explosion proof/ IK08
- CCT&Watts changeable
- 3 Phase selectable.
- Multiple Link with double wiring
- High quality PC material and metal clip
- Dimmable, emergency and sensor available.
- Instant start, no noise, no flickering
- 60°/90° lens + Clear diffuser available

➔ **Dimension Drawing**

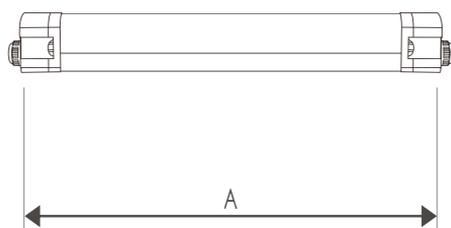

Model	A	B	C
60CM	600mm	78mm	66mm
120CM	1200mm	78mm	66mm
150CM	1500mm	78mm	66mm

➔ **Technical specification**

LM 80

 120°

 Watts changeable

 Color changeable

 DALI Dimmable

 Emergency

 Sensor

CRI ≥80

IP65


PF 0.9

 **HOURS 50000**


Model	Power	Lumen
60CM	25W	3750lm
120CM	50W	7500lm
150CM	60W	9000lm

Item	Parameter
Input Voltage	AC200-240V
THD	<17%
PF	>0.90
Starting time.	<0.5S
Working temperature	-20°C~45°C
Warranty	5 years
Mac Adam	<5

➔ Watts & CCT changeable

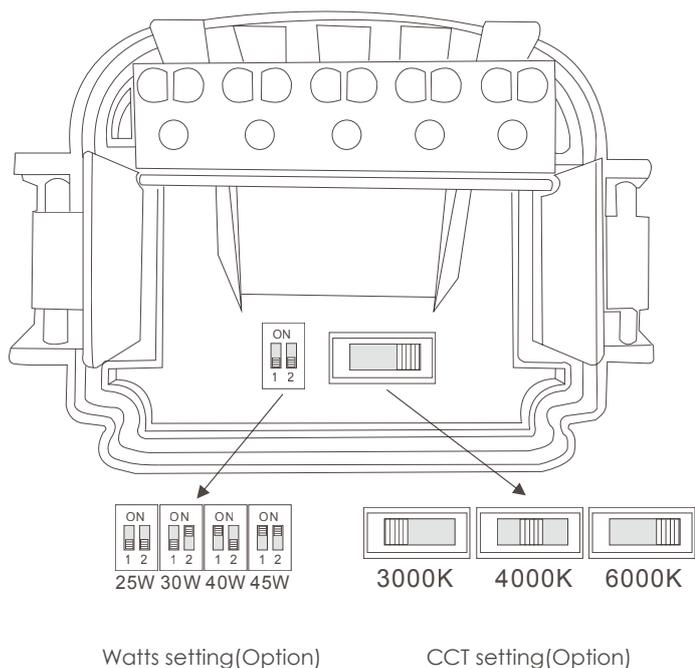


➔ Wirking Diagram

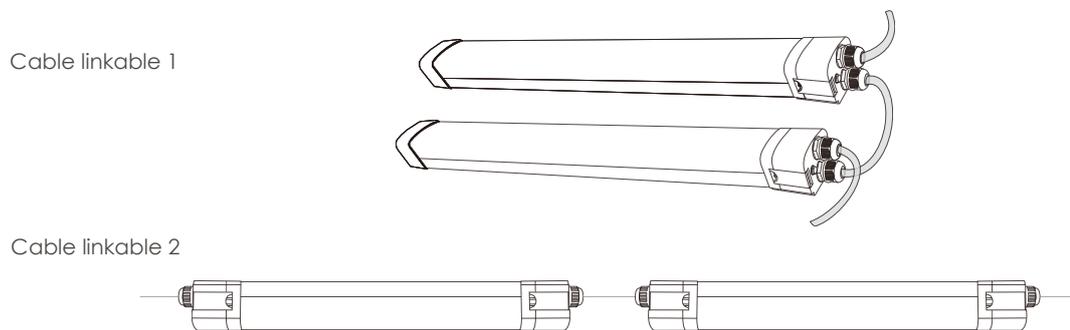


➔ Installation

① Ceiling Mounted Installation


① Drill ϕ 6mm holes on the roof/wall




② Insert ϕ 6mm expansion pipe into the hole and lamp angle can be rotated $\pm 45^\circ$

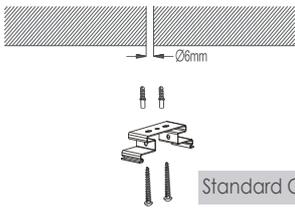

② Insert ϕ 6mm expansion pipe into the hole and fix the bracket by M4 screw.

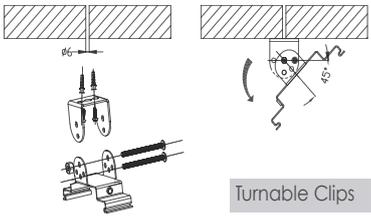


③ The final appearance

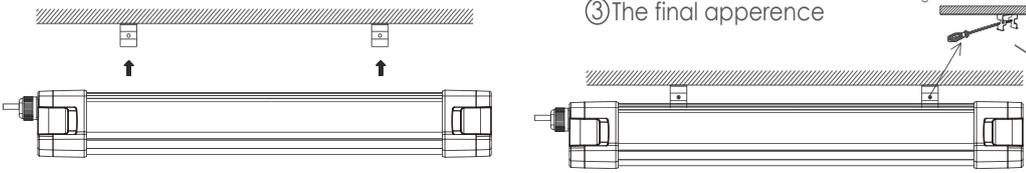

Tighten the screw with screwdriver


ATTENTION
Able to be connected in series, the max wattage is 1080 W under 220V AC



* Ceiling Mounted accessories are Firemaple Configuration.

② Hanging Installation


① Suspended way

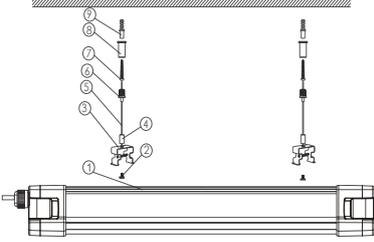

Spare Parts

1	LED Tri-proof Light	1PC
2	Suspension fixing screws	2PCS
3	U-shape holders	2PCS
4	Suspension fixing nuts	2PCS
5	Suspension wires	2PCS
6	Suspension fixed bushing	2PCS
7	Self-tapping screws	2PCS
8	Panel light fixed bushings	2PCS
9	slotted plastic screws	2PCS


② Hanging Installation

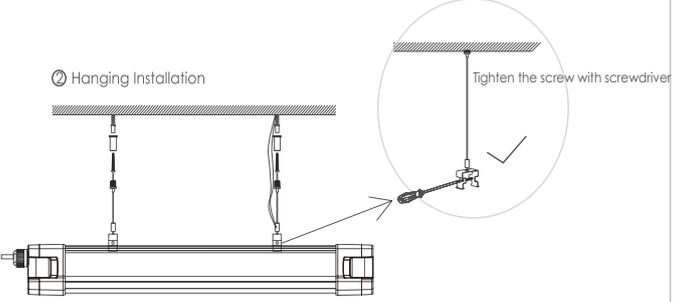

Tighten the screw with screwdriver

* Suspended accessories need to be paid additionally.

➔ Package

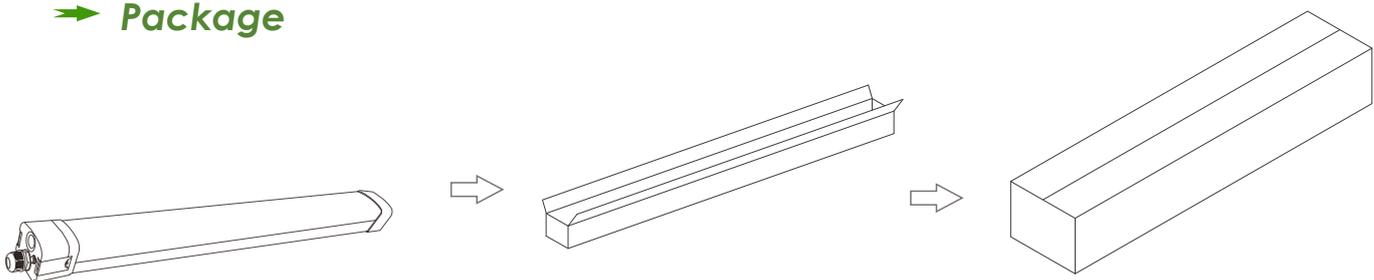

	Q'ty/CTN	N.W. /PCS (kg)	Size(mm)/CTN	G.W. (kg)/CTN
60CM	6pcs	9.00kg	705*220*230	11.00
120CM	6pcs	15.00kg	1305*220*230	18.00
150CM	6pcs	18.00kg	1605*220*230	22.00