





IP69K

Firemaple IP69K triproof light - TRP02 series

- IP69K waterproof /dust proof /explosion proof/ IK08
- Adjustable install angle with different lighting angle
- Corrosion resistance application
- Linkable available
- High quality PC material and metal clip
- Dimmable, emergency available.
- Instant start, no noise, no flickering
- High lumen efficiency 130lm/w



➔ Dimension Drawing

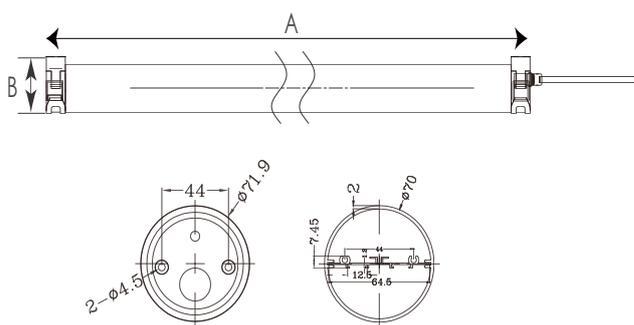

Model	A	B
60CM	600mm	71.9mm
90CM	900mm	71.9mm
120CM	1200mm	71.9mm
150CM	1500mm	71.9mm

B can be 38/45/60/76/100mm

➔ Technical specification



DALI Dimmable



120°

IP69K

PF 0.9

CRI ≥80





50000 HOURS

Model	Power	Lumen
60CM	20W	2600lm
90CM	30W	3900lm
120CM	40W	5200lm
150CM	45W	5850lm


Item	Parameter
Input Voltage	AC200-240V
THD	<17%
PF	>0.90
Starting time.	<0.5S
Working temperature	-20°C~45°C
Warranty	5 years
Mac Adam	<5

➔ Connection

Plastic connector and stainless steel connector for optional

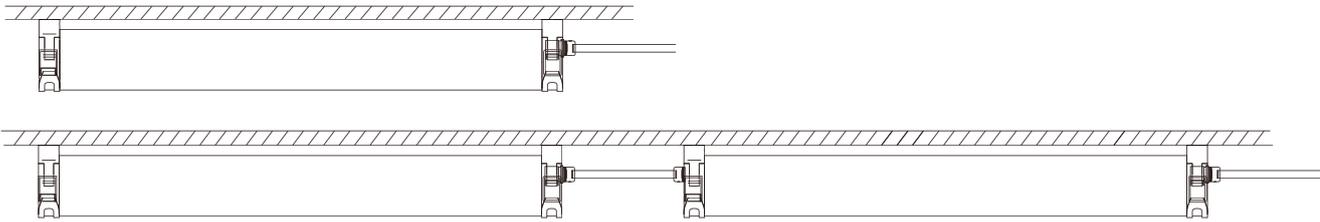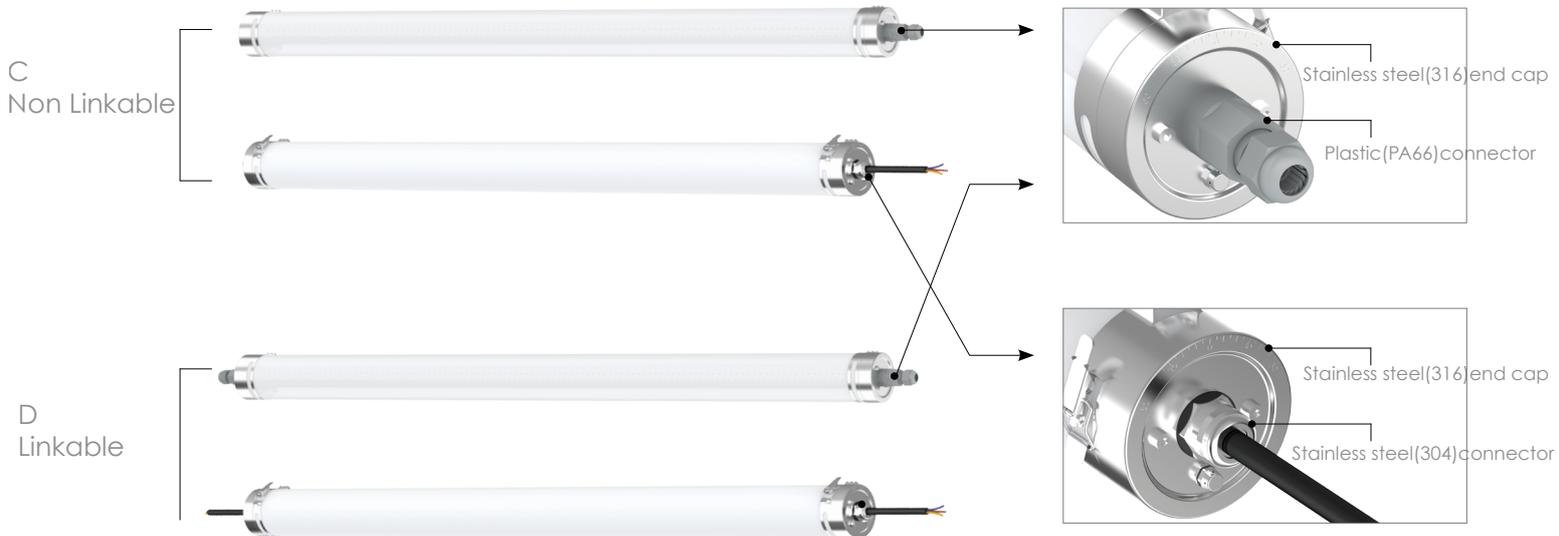

➔ Surface Installation

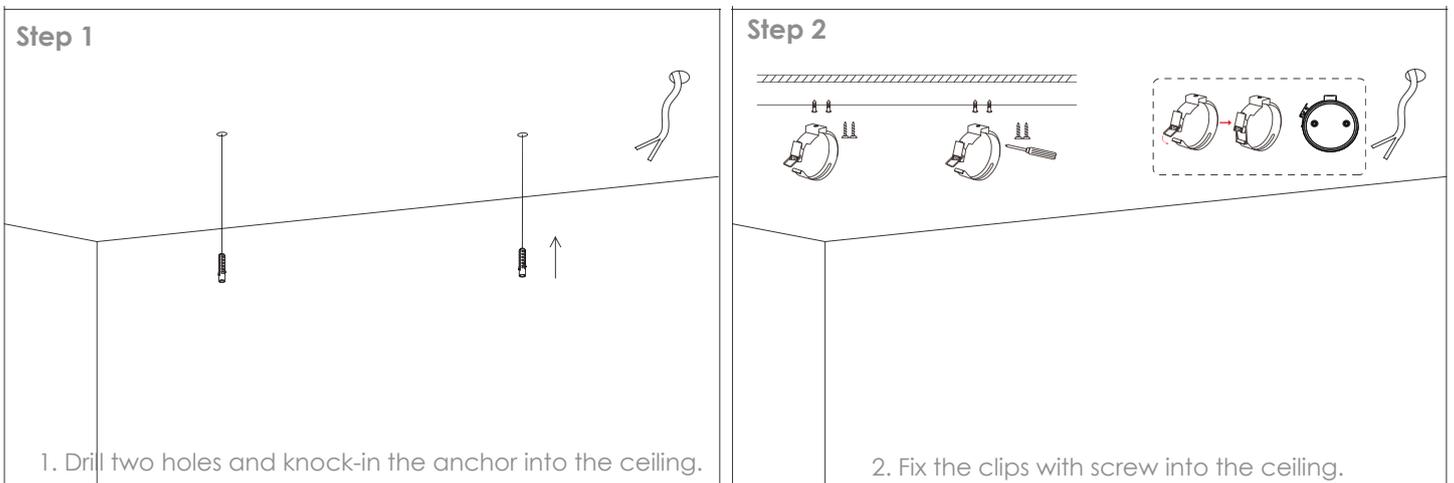

Step 3

3. Make the AC wire through water joint, then connect the wire correspondingly

Step 4

4. Fix the lamp with clips, connect male and female connector, then tighten the water joint

Step 5

5. Linkable installation way: Make two lamps in parallel connection with the connect wire, then turn on.
(Notice: For the last lamp, please add rubber plug to reach a perfect waterproof.)

Luminaire		20W	30W	45W
Linkable luminaires Qty	200-240V	52	35	24

➔ Suspend Installation


Step 1

1. Drill two holes and knock-in the anchor into the ceiling. Then fix the nut


Step 2

2. Make the steel wire through clips, then fix with the nut


Step 3

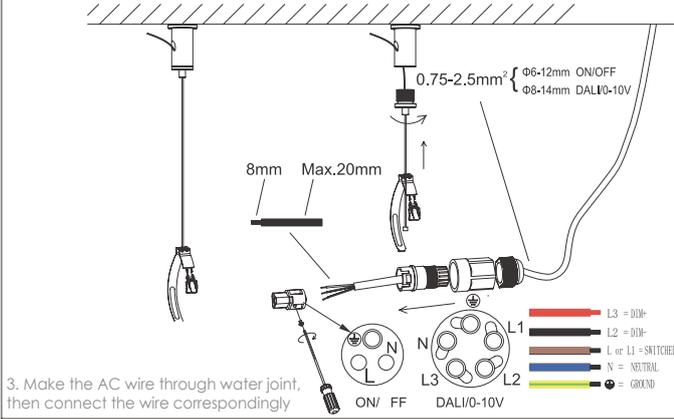


Step 4

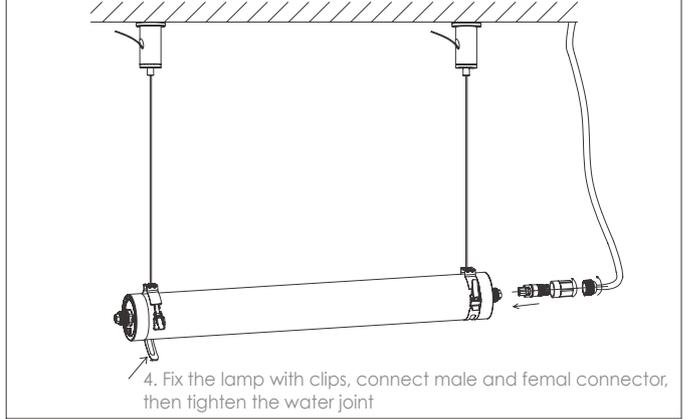

Step 5

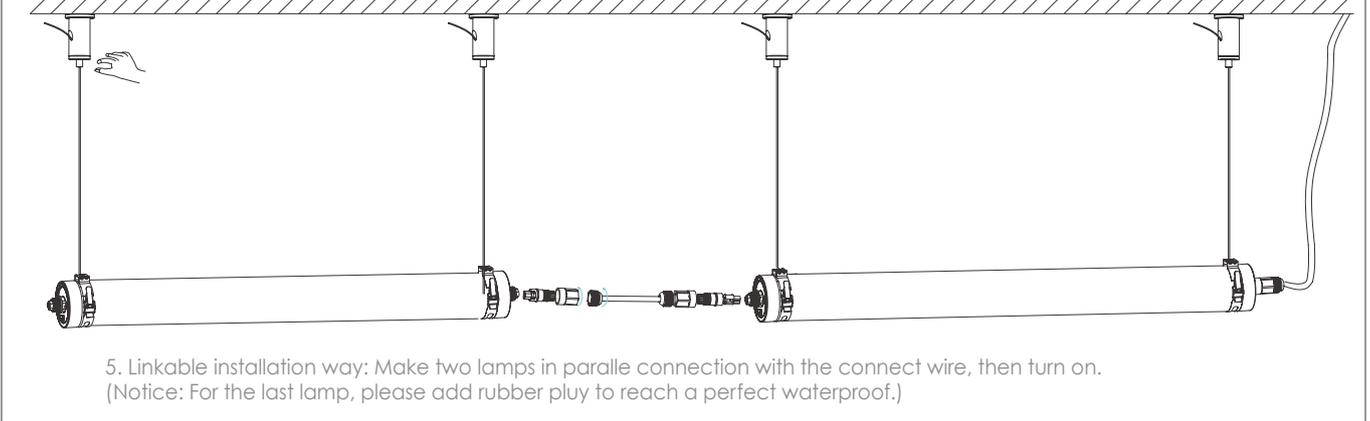

➔ Package

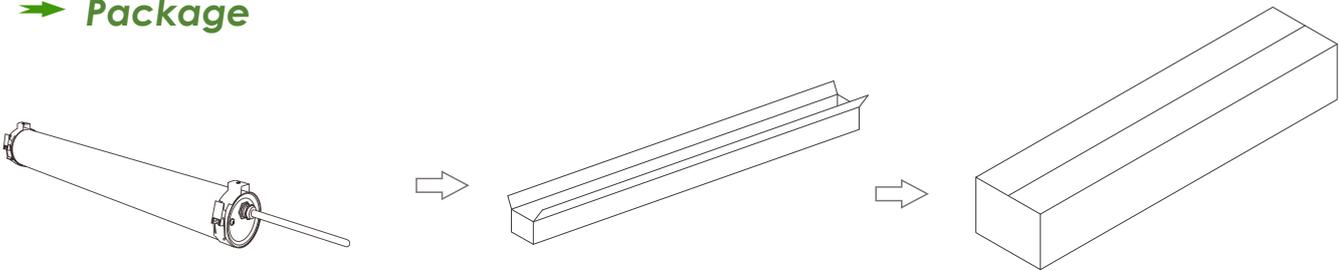

	Q'ty/CTN	N.W. /PCS (kg)	Size(mm)/CTN	G.W. (kg)/CTN
60CM	6pcs	0.91kg	700*250*180	7.00
90CM	6pcs	1.24kg	1000*250*180	9.00
120CM	6pcs	1.49kg	1300*250*180	11.00
150CM	6pcs	1.83kg	1600*250*180	13.50