




RPL04 - Round ceiling light series



- Round white/Black/Silver are available
- On/off, dim and emergency are available
- PC diffusor, PMMA diffusor available
- UGR>21 and UGR<19 available
- PS/MS/PMMA LGP available.
- Suspend and surface mount are available.
- Environment friendly, without Mercury or hazardous substances

➔ Dimension Drawing

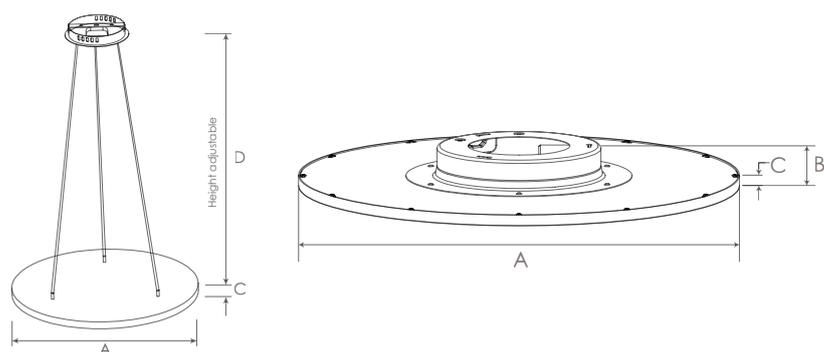

Model	A	B	C
RPL04-400	400mm	57mm	12mm
RPL04-500	500mm	57mm	12mm
RPL04-600	600mm	57mm	12mm
RPL04-800	800mm	57mm	12mm
RPL04-1000	1000mm	57mm	12mm
RPL04-1200	1200mm	57mm	12mm

➔ Photometric diagram

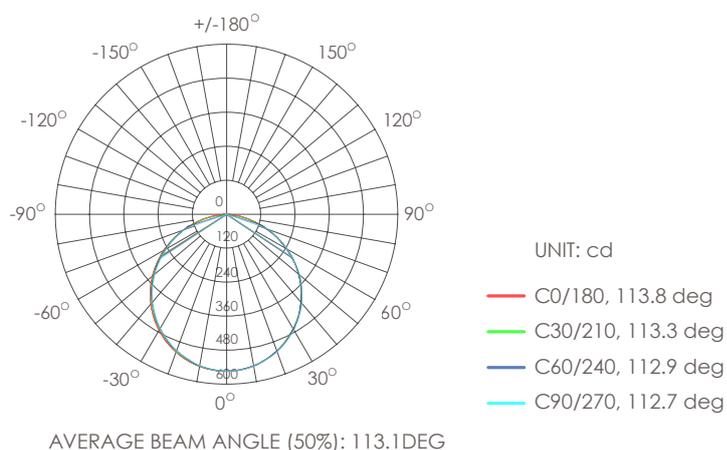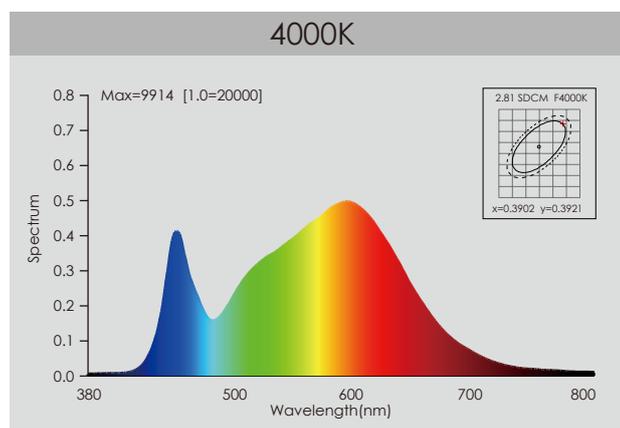

➔ Technical specification




Item	Parameter	Item	Parameter	Diameter	Power
Power	24-100W	Input Voltage	AC200-240V	400mm	24W
Lumen output	2400-10000lm	THD	<17%	500mm	28W
CRI	RA80+	PF	>0.90	600mm	36W
Frame	no grooves	Starting time.	<0.5S	800mm	50W
Aluminum white	RAL9016/9003	Working temperature	-20°C~45°C	1000mm	80W
Diffusor	PC UGR<19	Warranty	5 years	1200mm	100W
Dimmable	On/off, DALI	Mac Adam	<5		

➔ Installation


Suspended installation.

1. Unbox panel light and accessory pack.
2. Switch off, fix bracket into ceiling with screw.
3. Insert the hanging wire into wall mount bracket, connect wire L/N/E to the main supply respectively.
 - L = BROWN
 - N = BLUE
 - ⊕ = YELLOW-GREEN
4. Fix the wall mount bracket on ceiling by screw.
5. Hang panel to suspending rope and connect the DC connector
6. Adjust the length of hanging wire to proper height, Restore the power and switch on.

Surface mounted

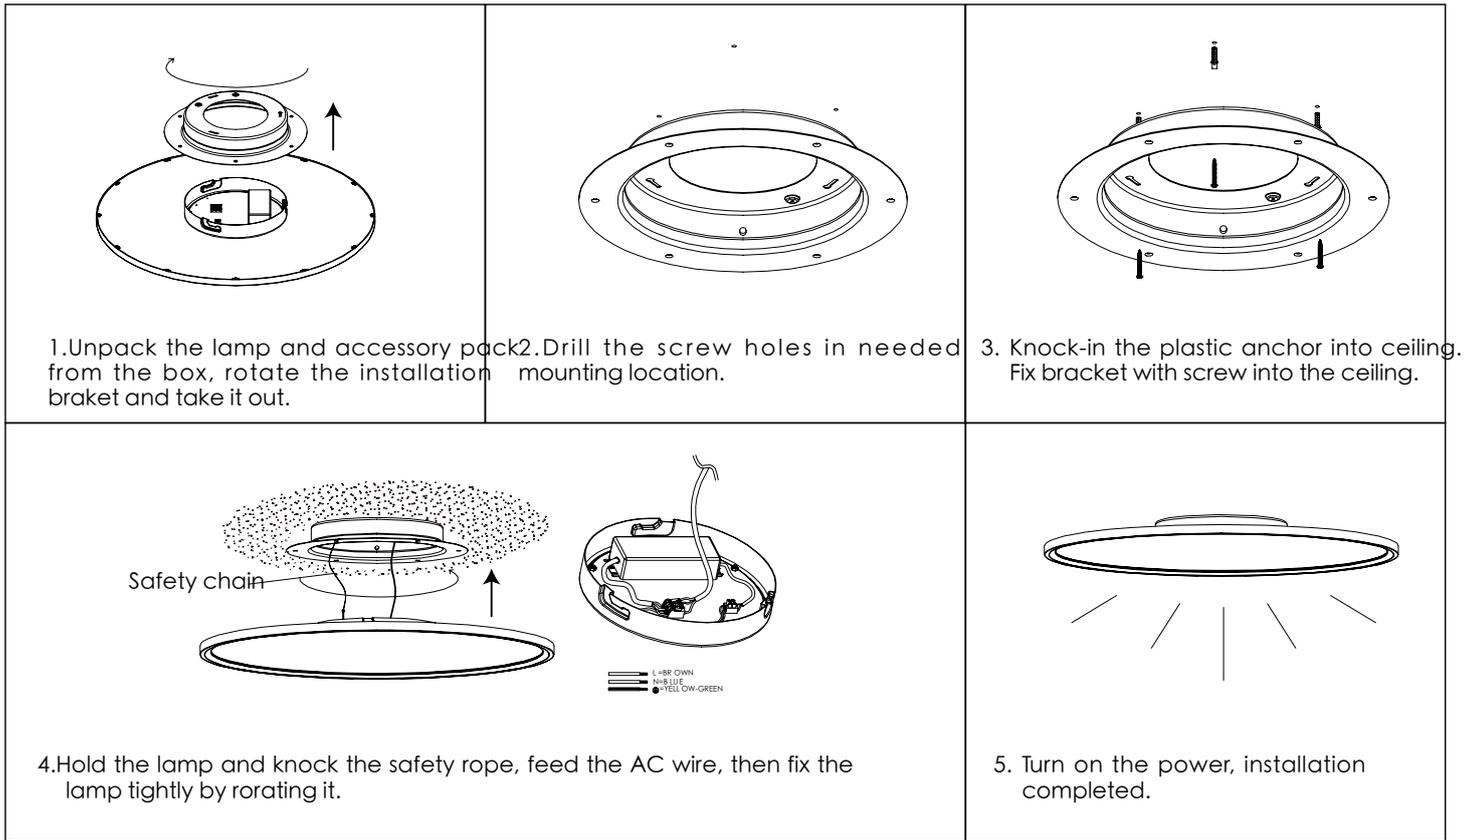

➔ Package

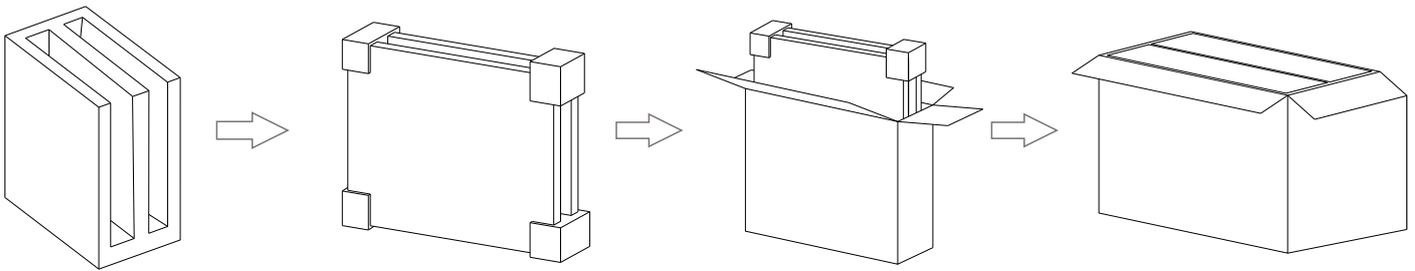

	Q'ty/CTN	Size(mm)/CTN	G.W. (kg)/CTN
FM-RPL04-400	5pcs	450*450*440	16.20
FM-RPL04-500	5pcs	550*550*440	20.50
FM-RPL04-600	5pcs	650*650*440	27.60
FM-RPL04-800	2pcs	850*850*180	20.00
FM-RPL04-1000	2pcs	1050*1050*180	32.30
FM-RPL04-1200	2pcs	1250*1250*180	44.00