






**TRP03 series IP65 triproof light.**

- IP65 waterproof /dust proof /explosion proof/ IK08
- Single CCT&Watts
- Multiple Link with double wiring
- High quality PC material and metal clip
- On/off, dimming and emergency available.
- Instant start, no noise, no flickering
- Milky/frosted diffuser available



➔ **Dimension Drawing**

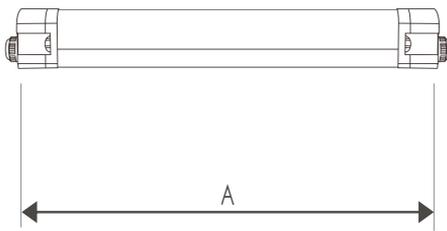

Model	A	B	C
60CM	600mm	83mm	68mm
120CM	1200mm	83mm	68mm
150CM	1500mm	83mm	68mm

➔ **Technical specification**

**LM 80**

 120°

 Single watt

 Single CCT

 DALI Dimmable

 Emergency

 Sensor

**CRI ≥80**

**IP65**

**PF 0.9**


 **50000** HOURS

Model	Power	Lumen	Item	Parameter
60CM	25W	3500-4000lm	Input Voltage	AC200-240V
120CM	40/50/60W	5600-9600lm	THD	<17%
150CM	60/80W	8400-12800lm	PF	>0.90
			Starting time.	<0.5S
			Working temperature	-20°C~45°C
			Warranty	5 years
			Mac Adam	<5


## ➔ Installation

### ① Ceiling Mounted Installation

① Drill  $\phi$  6mm holes on the roof/wall




② Insert  $\phi$  6mm expansion pipe into the hole and lamp angle can be rotated  $\pm 45^\circ$




Standard Clips

② Insert  $\phi$  6mm expansion pipe into the hole and fix the bracket by M4 screw.

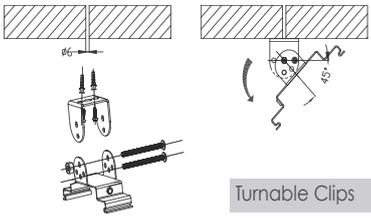


Turnable Clips

**ATTENTION**  
Able to be connected in series, the max wattage is 1080 W under 220V AC



③ The final appearance

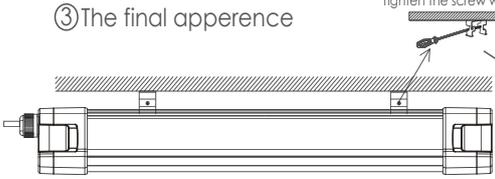


Tighten the screw with screwdriver

\* Ceiling Mounted accessories are Firemaple Configuration.

### ② Hanging Installation


① Suspended way

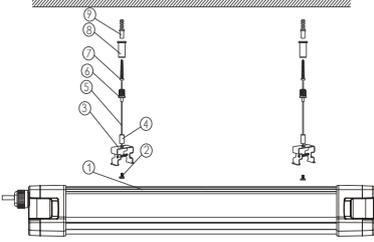

Spare Parts

1	LED Tri-proof Light	1PC
2	Suspension fixing screws	2PCS
3	U-shape holders	2PCS
4	Suspension fixing nuts	2PCS
5	Suspension wires	2PCS
6	Suspension fixed bushing	2PCS
7	Self-tapping screws	2PCS
8	Panel light fixed bushings	2PCS
9	slotted plastic screws	2PCS


② Hanging Installation

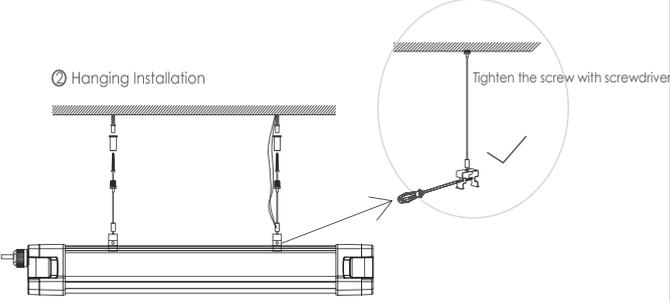

Tighten the screw with screwdriver

\* Suspended accessories need to be paid additionally.

## ➔ Package

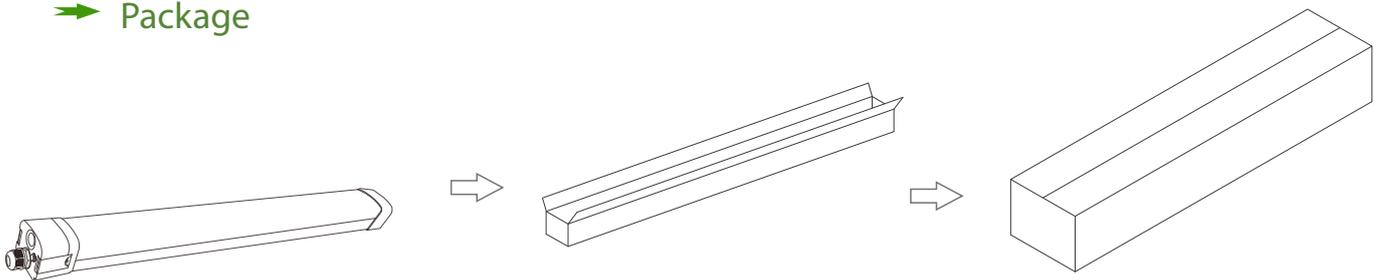

	Q'ty/CTN	N.W. /PCS (kg)	Size(mm)/CTN	G.W. (kg)/CTN
60CM	6pcs	9.00kg	705*220*230	11.00
120CM	6pcs	15.00kg	1305*220*230	18.00
150CM	6pcs	18.00kg	1605*220*230	22.00