





**TRP04 series IP65 triproof light.**

- IP65 waterproof /dust proof /explosion proof/ IK08
- Single CCT&Watts
- Multiple Link with double wiring
- High quality PC material and metal clip
- On/off, dimming and emergency available.
- Instant start, no noise, no flickering
- Milky/frosted diffuser available



➔ **Dimension Drawing**

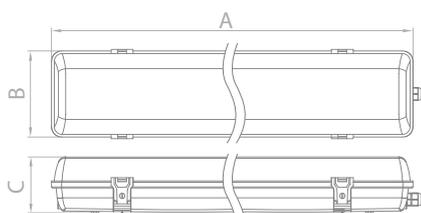

Model	A	B	C
60CM	600mm	80mm	72mm
120CM	1200mm	80mm	72mm
150CM	1500mm	80mm	72mm

➔ **Technical specification**

**LM 80**

 120°

 Single watt

 Single CCT

 DALI Dimmable

 Emergency

 Sensor

**CRI ≥80**

**IP65**

**PF 0.9**


 **50000** HOURS

Model	Power	Lumen
60CM	20W	2200-3000lm
120CM	40W	4400-6000lm
150CM	50/60W	5500-9000lm


Item	Parameter
Input Voltage	AC200-240V
THD	<17%
PF	>0.90
Starting time.	<0.5S
Working temperature	-20°C~45°C
Warranty	5 years
Mac Adam	<5

## → Connection

Single side AC input




Double side AC input and Multiple link




## → Installation


① Seat the fixing clips to the mounting surface according to the dimension instruction.

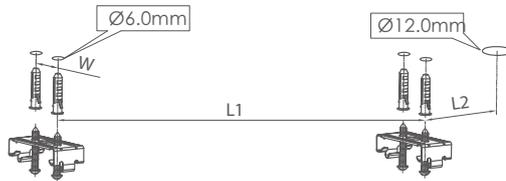


② Seat Push the Lamp body into the mounting clips.

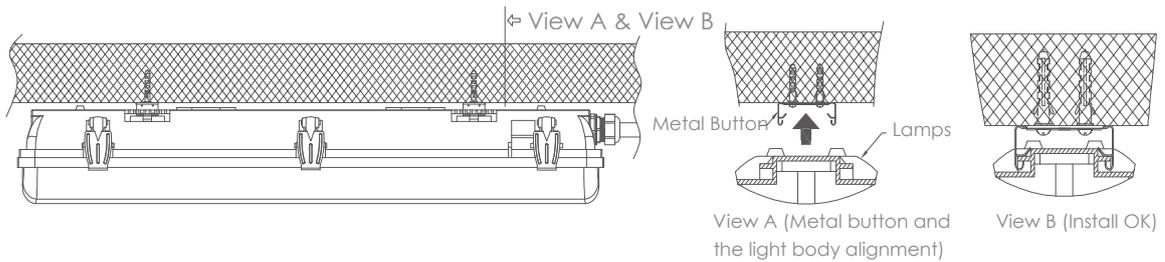

③ Turn off the power and connect the input wire.

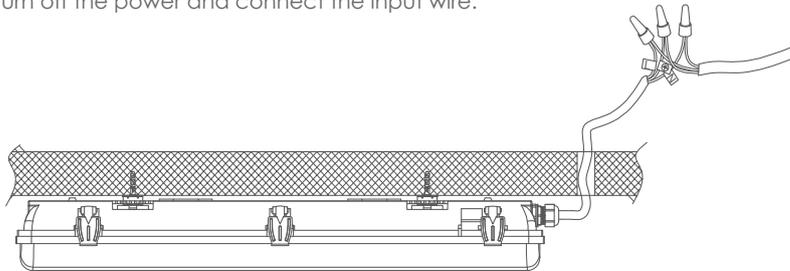

## → Package

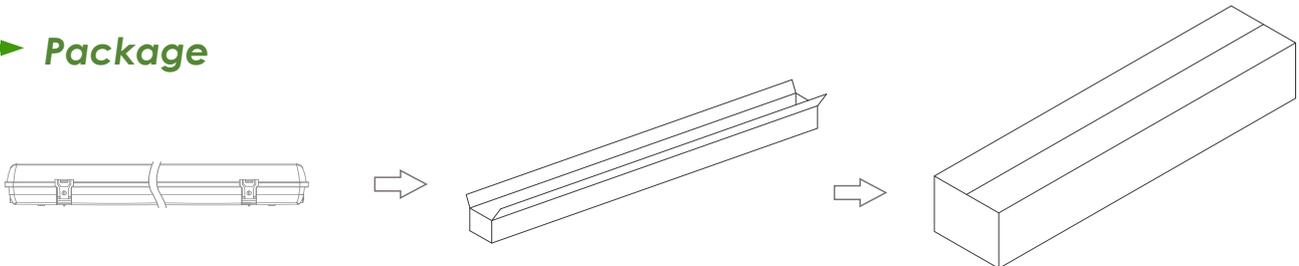

	Q'ty/CTN	N.W. /PCS (kg)	Size(mm)/CTN	G.W. (kg)/CTN
60CM	6pcs	9.00kg	705*220*230	11.00
120CM	6pcs	15.00kg	1305*220*230	18.00
150CM	6pcs	18.00kg	1605*220*230	22.00