

## BEFORE YOU BEGIN

Read these instructions completely and carefully.

### ⚠ WARNING/AVERTISSEMENT

#### RISK OF ELECTRIC SHOCK

- Turn power off before inspection, installation or removal.
- Properly ground electrical enclosure.

#### RISK OF FIRE

- Follow all NEC and local codes.
- Use only UL or IEC approved wire for input/output connections. Minimum size 18 AWG (0.75mm<sup>2</sup>).

#### RISQUES DE DÉCHARGES ÉLECTRIQUES

- Coupez l'alimentation avant d'inspecter, installer ou déplacer le luminaire.
- Assurez-vous de correctement mettre à la terre le boîtier d'alimentation électrique.

#### RISQUES D'INCENDIE

- Respectez tous les codes NEC et codes locaux.
- N'utilisez que des fils approuvés par UL ou IEC pour les entrées/sorties de connexion. Taille minimum 18 AWG (0.75mm<sup>2</sup>).

## Prepare Electrical Wiring



### Electrical Requirements

- The LED luminaire must be connected to the mains supply according to its ratings on the product label.



### Grounding Instructions

- The grounding and bonding of the overall system shall be done in accordance to local electric code of the country where the luminaire is installed.

## Save These Instructions

Use only in the manner intended by the manufacturer. If you have any questions, contact the manufacturer.

### ⚠ CAUTION



Do not perforate the integrity of the luminaire. Only screw into the threaded mounting bracket holes located at the four corners of the fixture.

### ⚠ WARNING/AVERTISSEMENT


Risk of Fire. Do not install insulation within 3 inches (76 mm) of luminaire top.  
Risques d'incendie. Ne pas installer d'isolation à moins de 76 mm (3 pouces) au-dessus du luminaire.

Environmental Operating Temperature Range	-10°C to +40°C
Environmental Rating	Dry location rated
Environmental Storage Temperature Range	-40°C to +60°C


## CEILING MOUNTED FRAME KITS

Model	FM- SMP-6060	FM- SMP-30120
Item		
Dimension	600X600mm 620X620mm	300X1200mm


## INSTALLATION STEPS

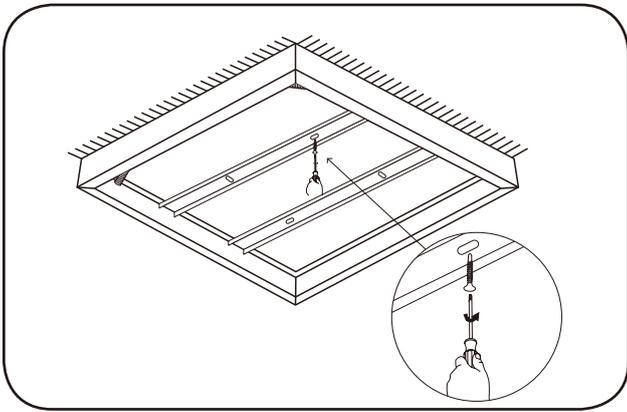


1 Mount the frame to the ceiling.

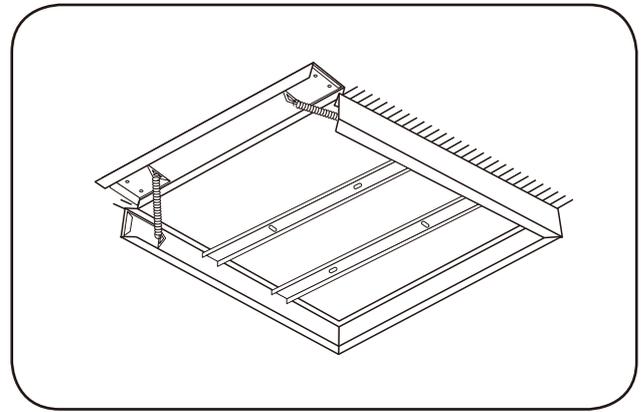

2 Open the side with spring

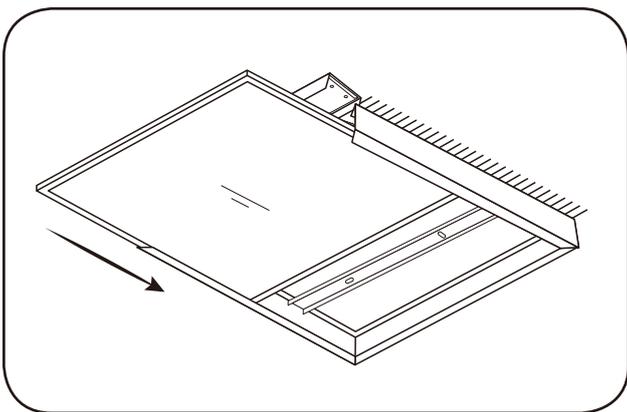

3 Slide the LED Panel in to the frame.

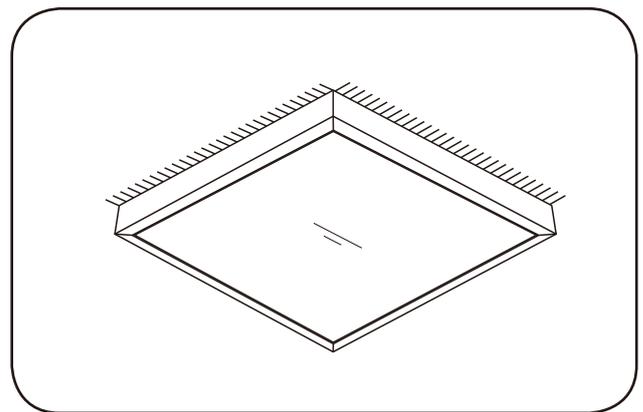

4 Close the Frame